



Hand pumps
 PM 12-25-45 byB-AISI-316 (FKM)
 Tech sheet

DETAILS
 with release hand knob
 with pressure relief valve
 double acting hand pump for single acting cylinder
 for fixing to tank



SPECIFICATIONS
 Stainless steel AISI 316 pump body
 Stainless steel AISI 630 piston rod with Niploy coating (50 µm)
 Viton Seals (FKM)
 Lever connection Ø 27
 Stainless steel AISI 316 external parts
 Oil tank mounting kit including
 Equipped with non return valve on the outlet port
 Triple sealing system made to prevent any oil leakage and sweating onto the piston rod

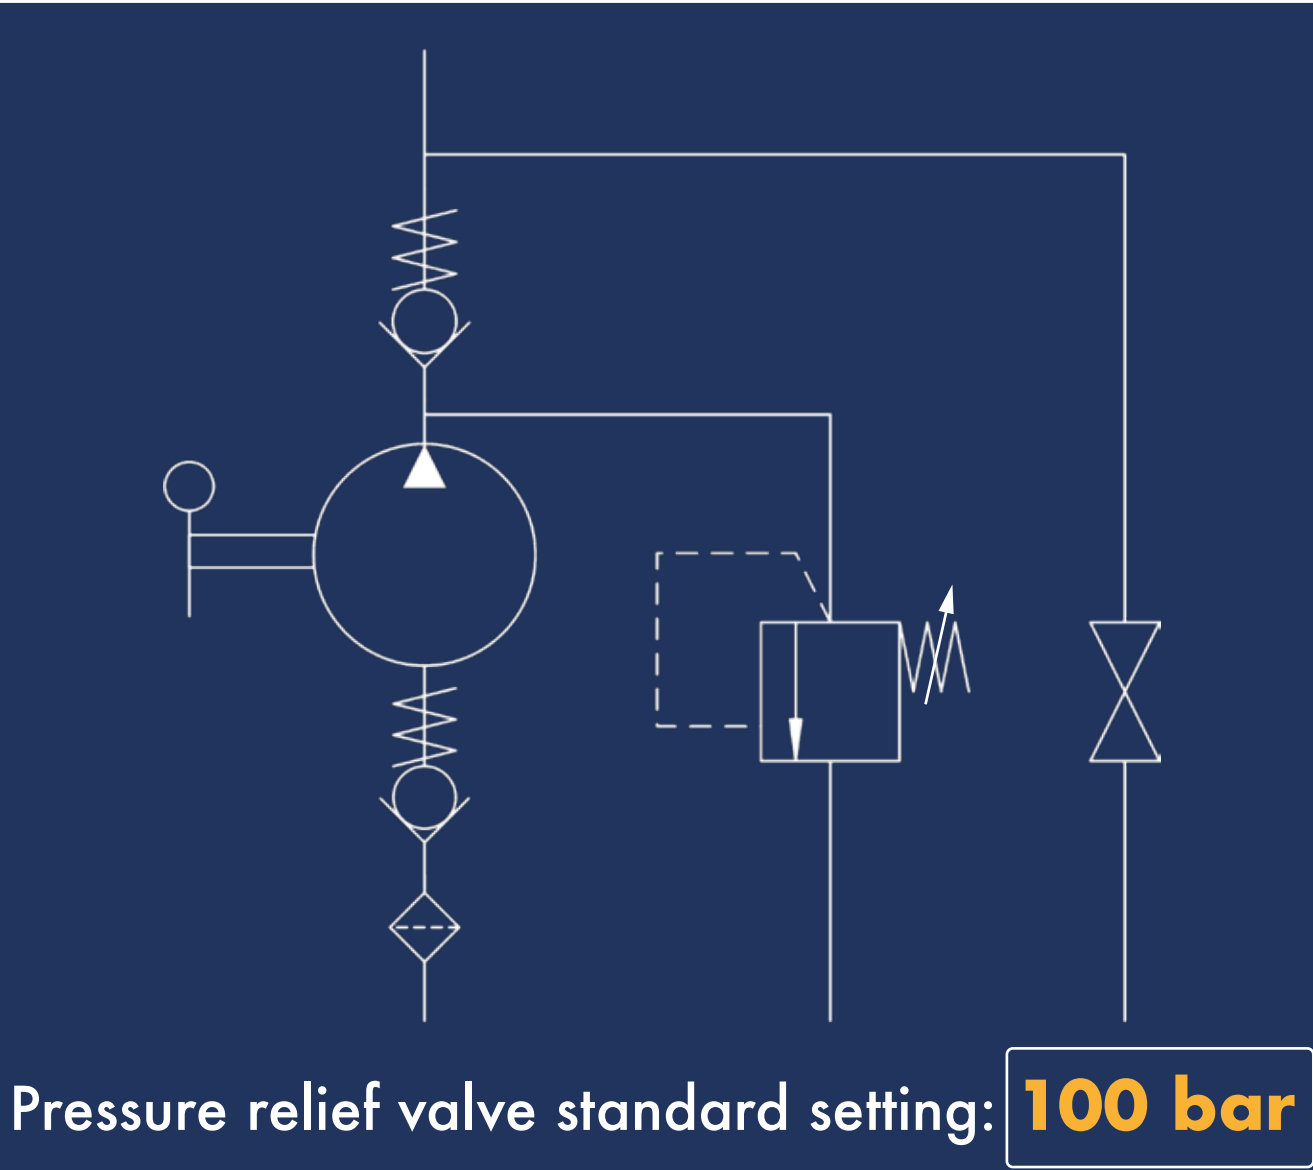

On Demand ATEX Certificates
 II2G Ex h IIB TX Gb
 II2D Ex h IIIB TX Db

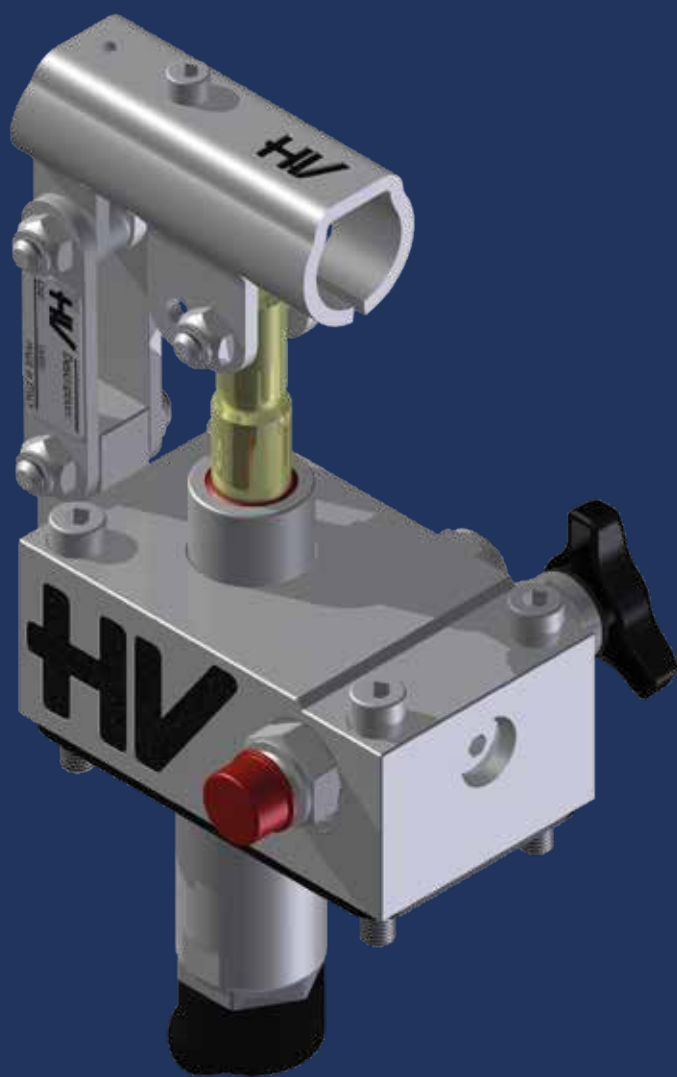

EFFORT DIAGRAM

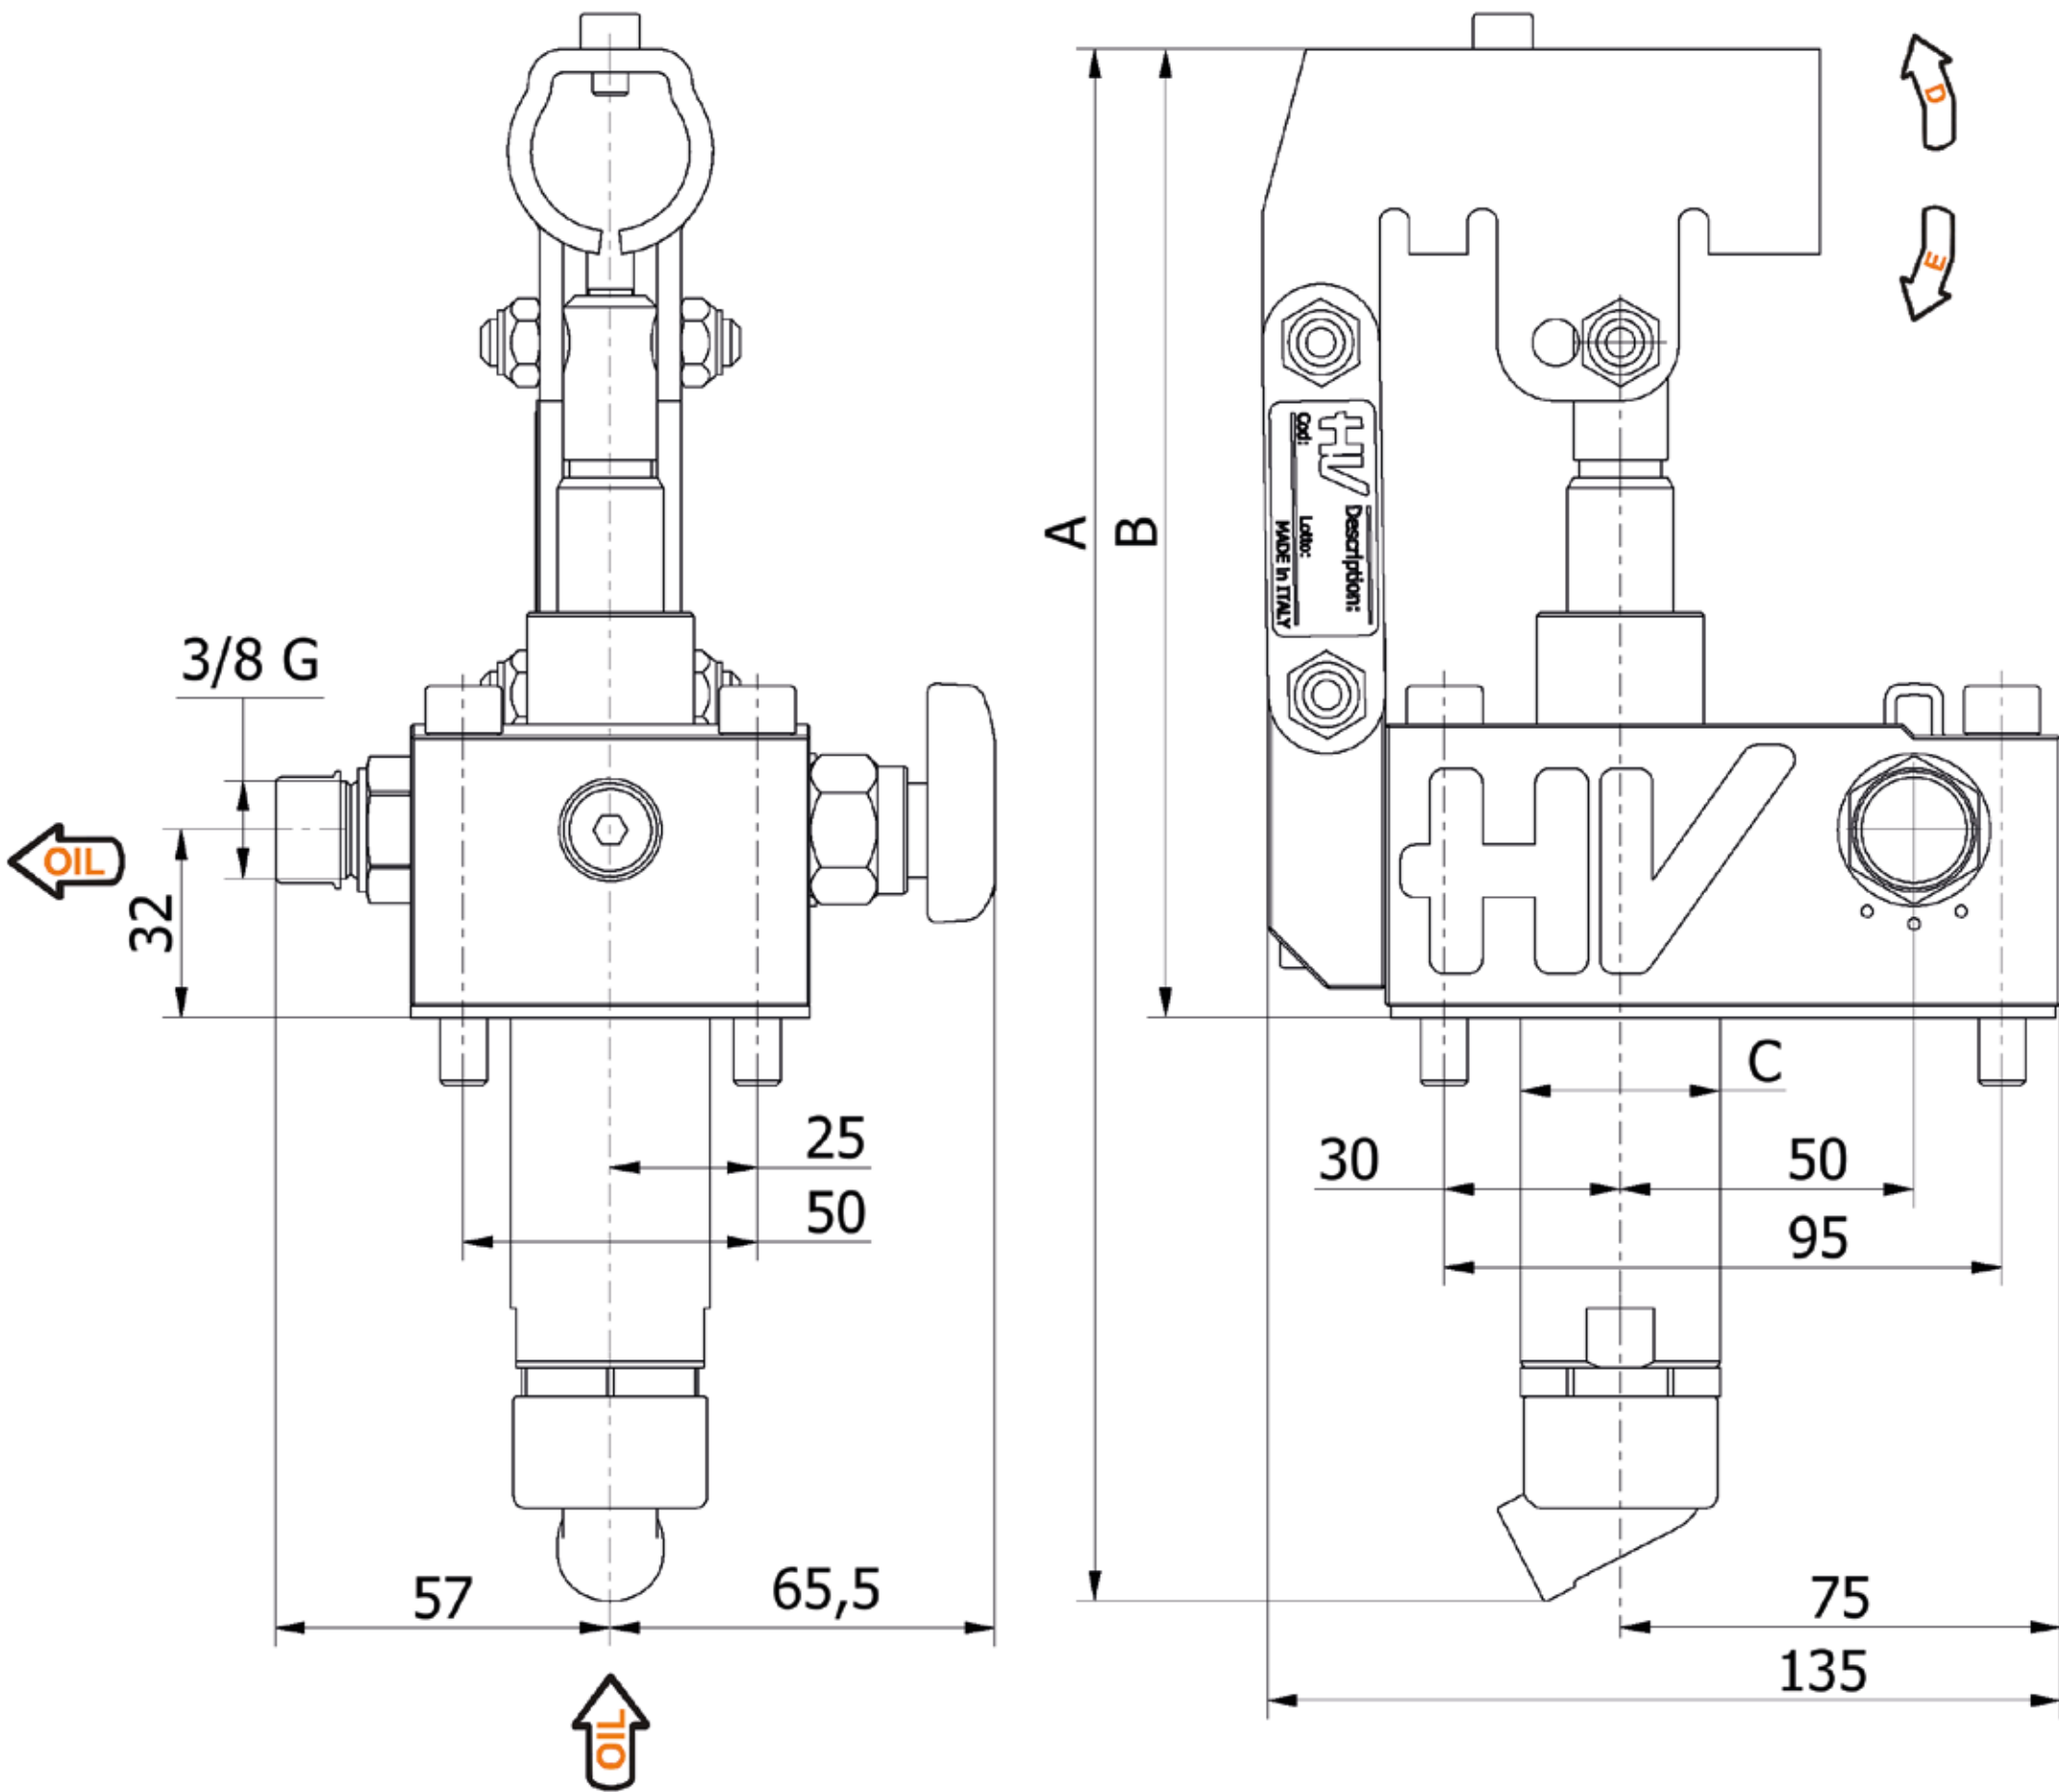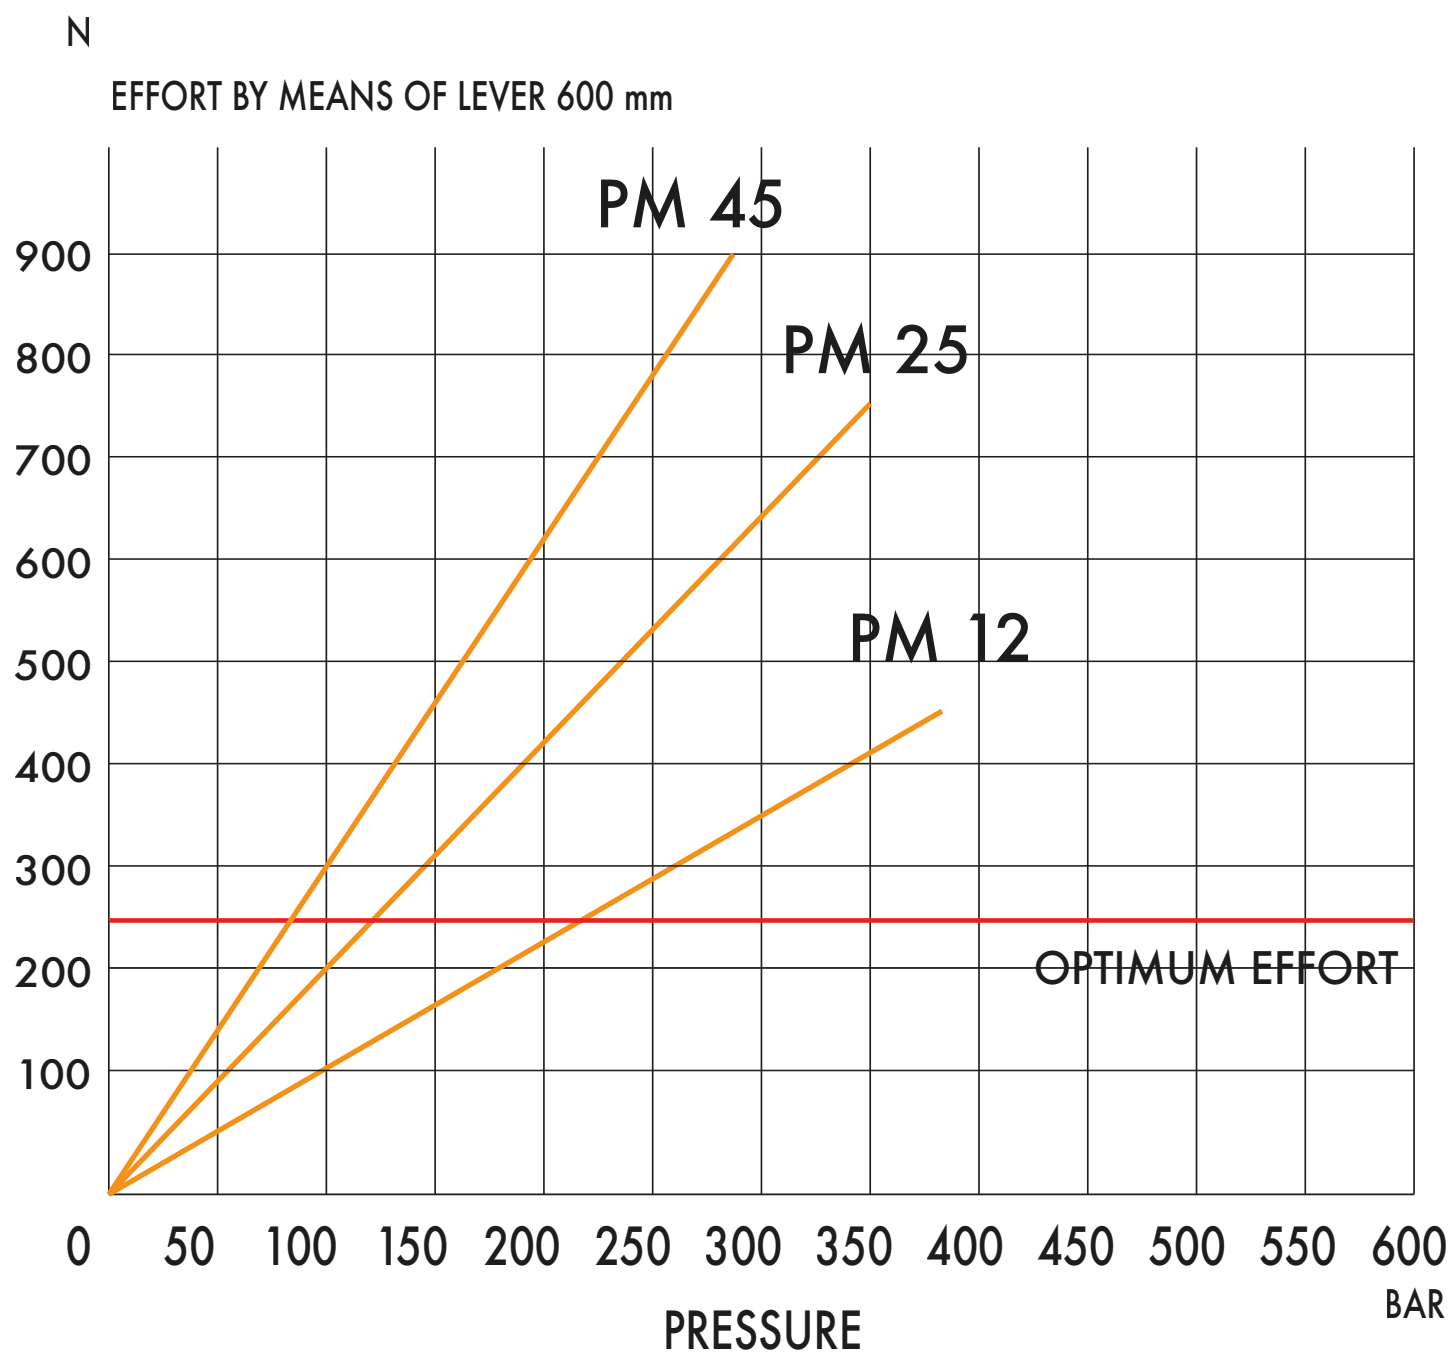

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm ³	PRESSURE BAR		MASS KG	CODE
							OPTIMAL	MAX		
12	253	166	34	26	31	12,095	220	380	4,200	6050.7001
25	273	172	34	30	30	25,280	120	350	4,200	6051.7001
45	286	179	42	42	29	40,977	80	280	4,500	6052.7001