

Hand pumps

PM2V 5-80 Lm-pm-s


Tech sheet

DETAILS



with release hand knob
 with exclusion lever for the 1st speed
 with pressure-gauge prearrangement
 two speed hand pump for a single acting cylinder
 for fixing to tank

SPECIFICATIONS

Cast iron body
 Piston treated with Niploy
 White zinc plated support lever
 Lever connection Ø 27
 White zinc plated external parts
 Standard colour black
 Oil tank mounting kit included
 With pressure-gauge
 prearrangement, connection: 1/4 G

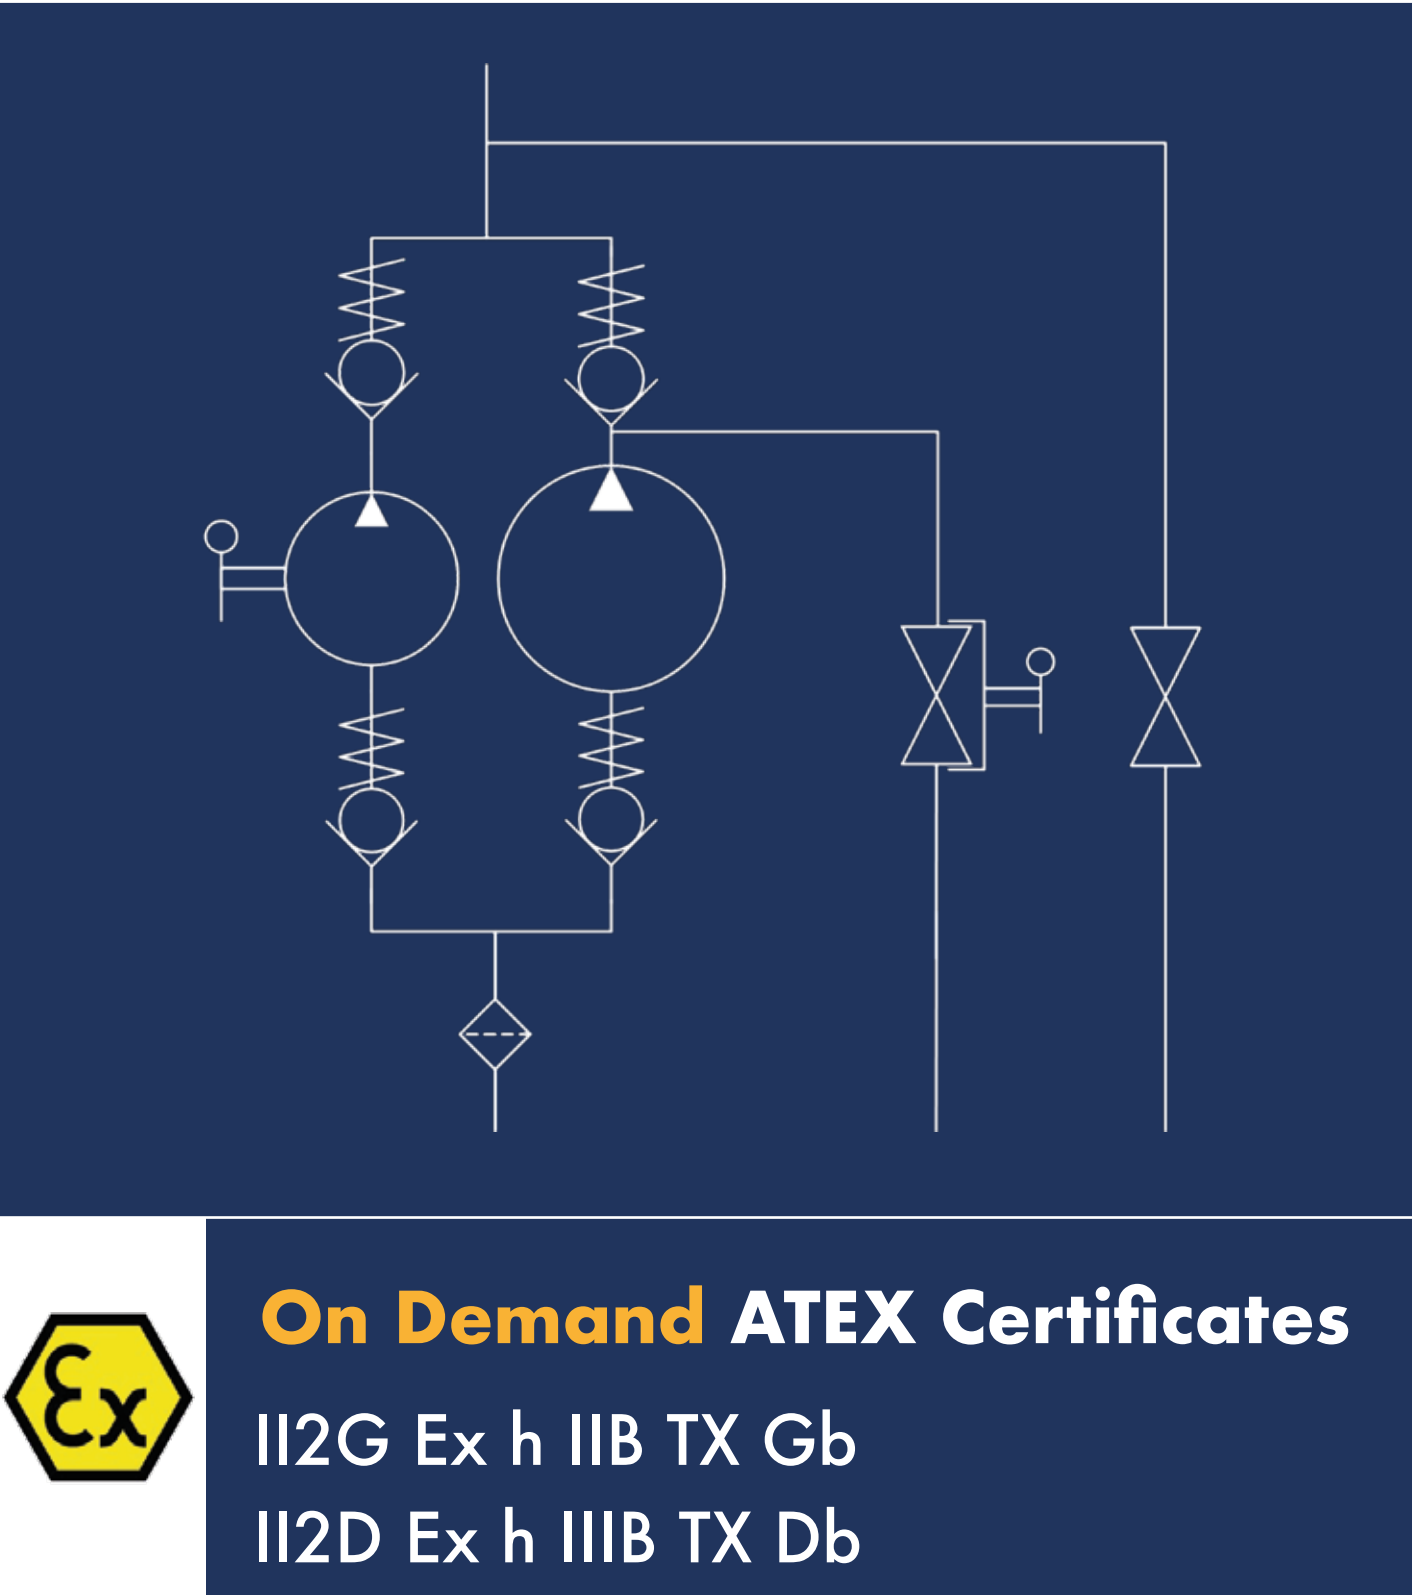

EFFORT DIAGRAM

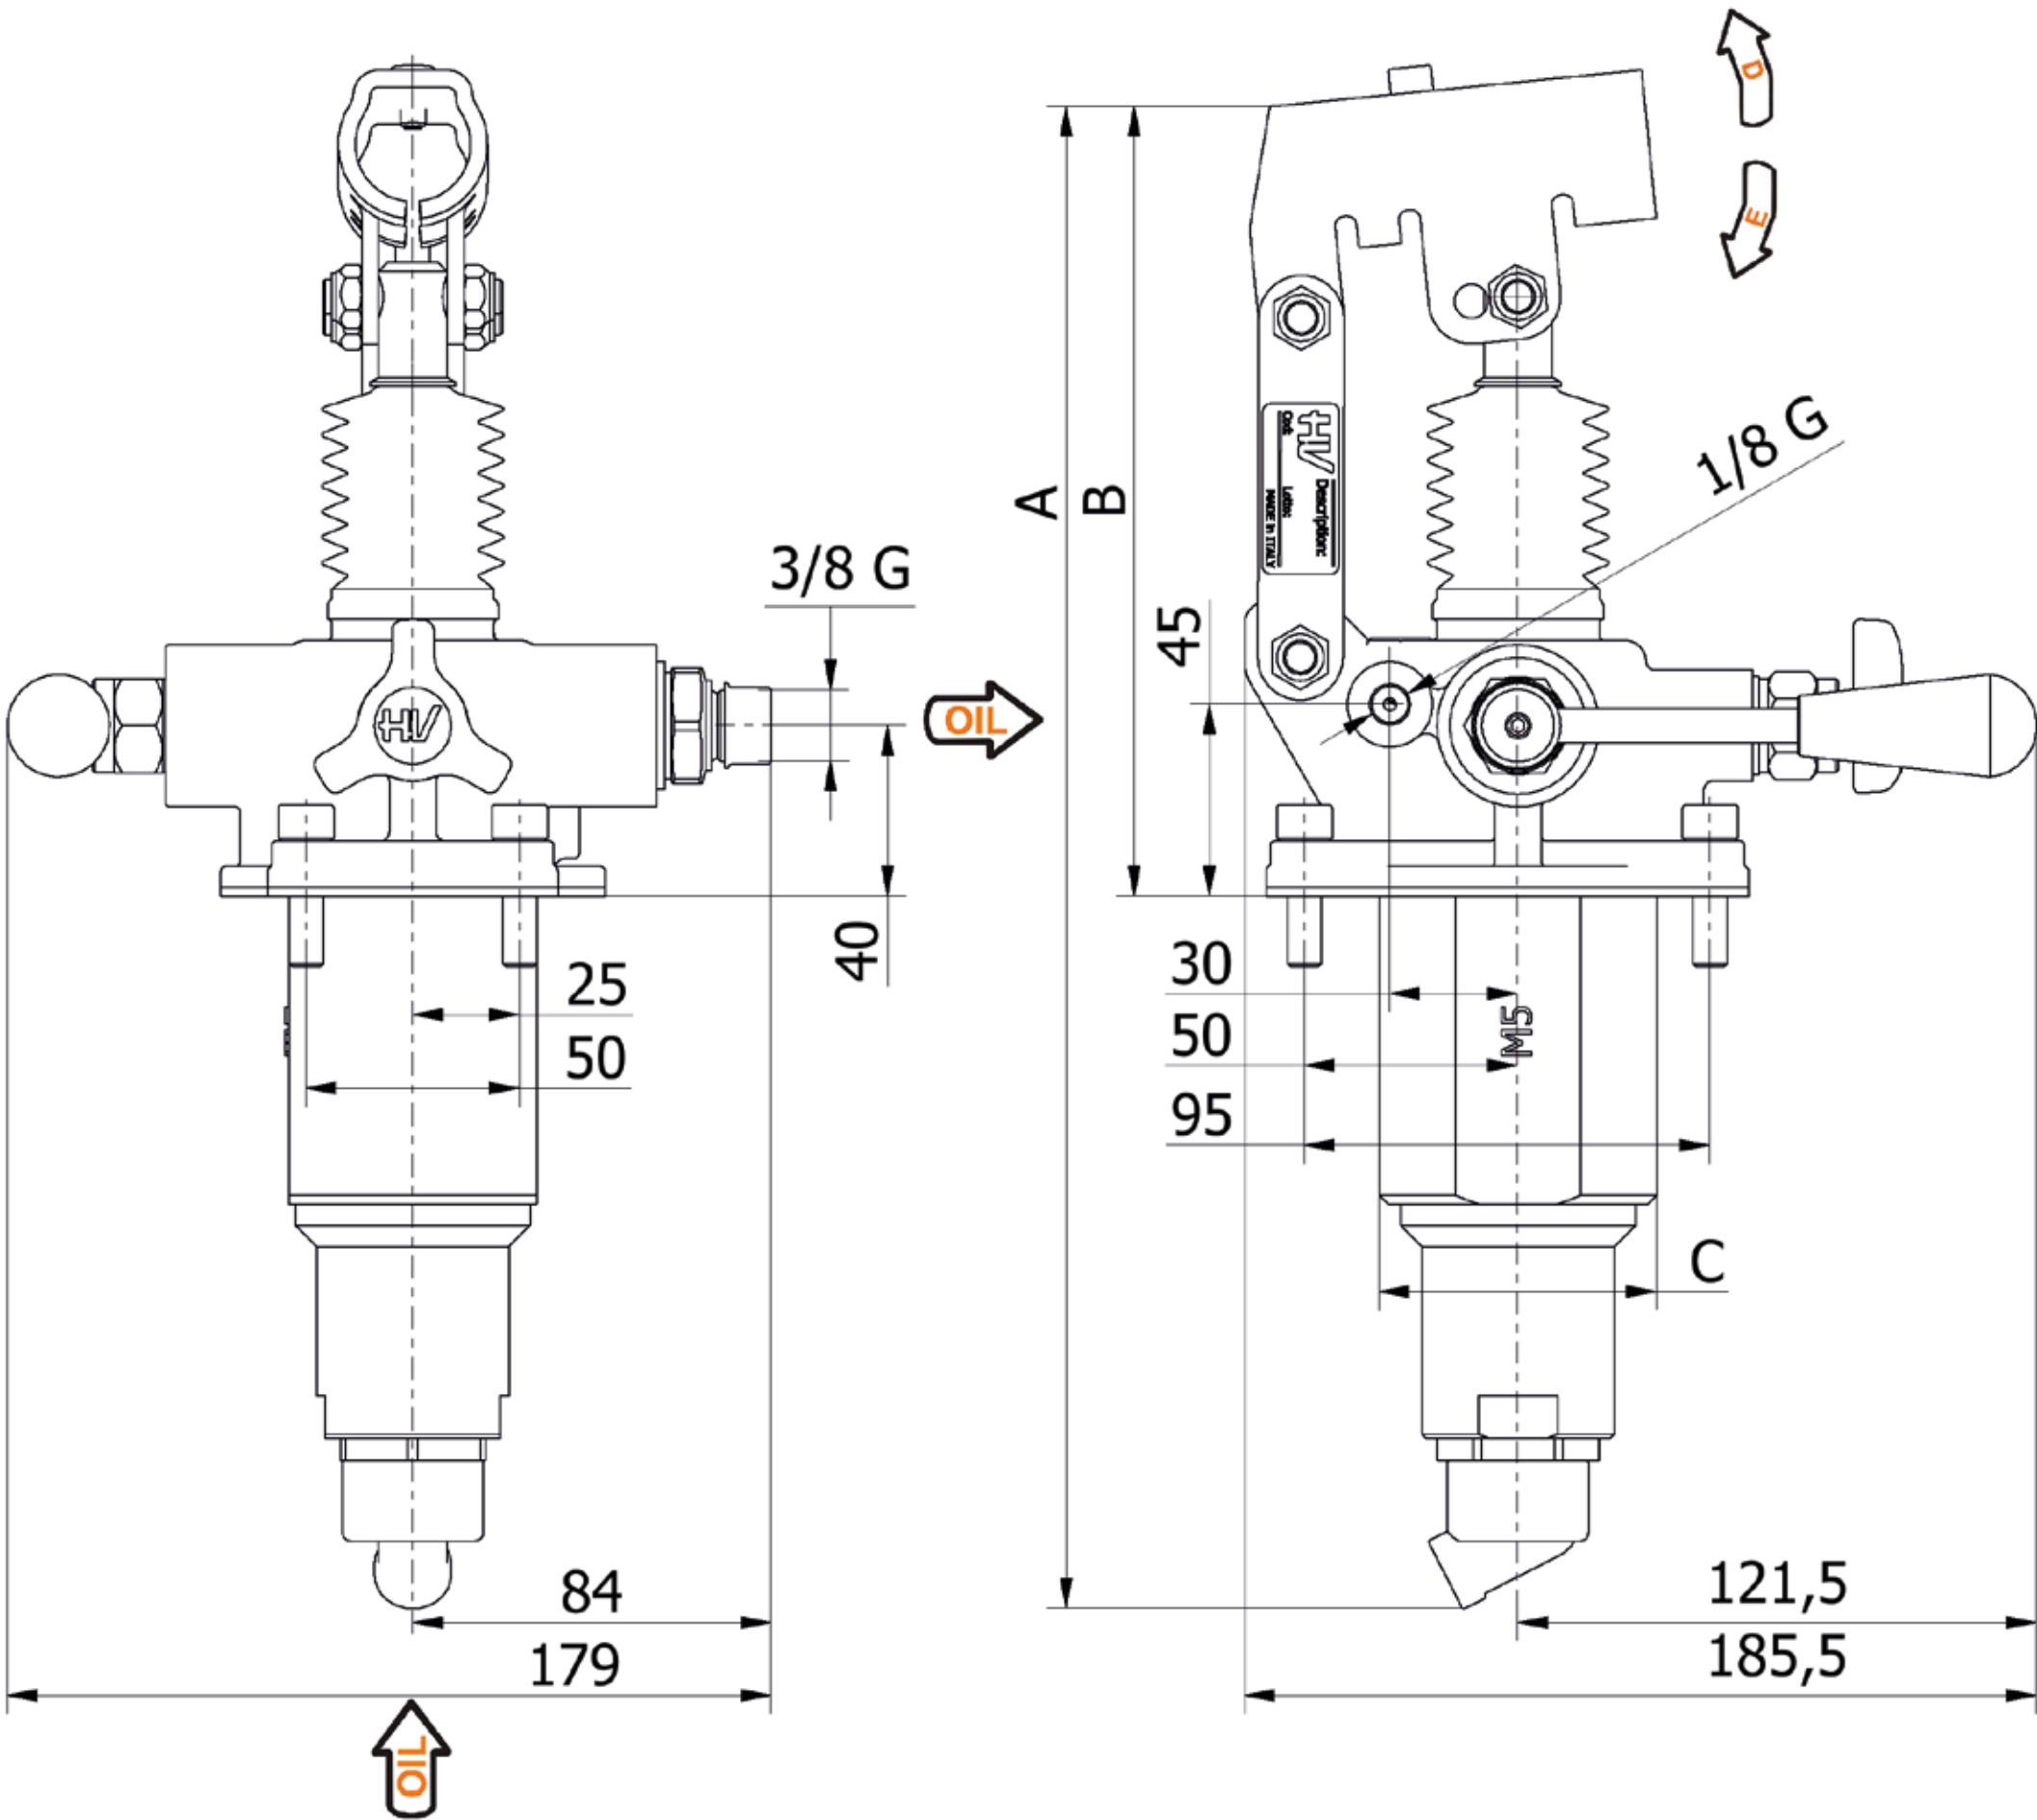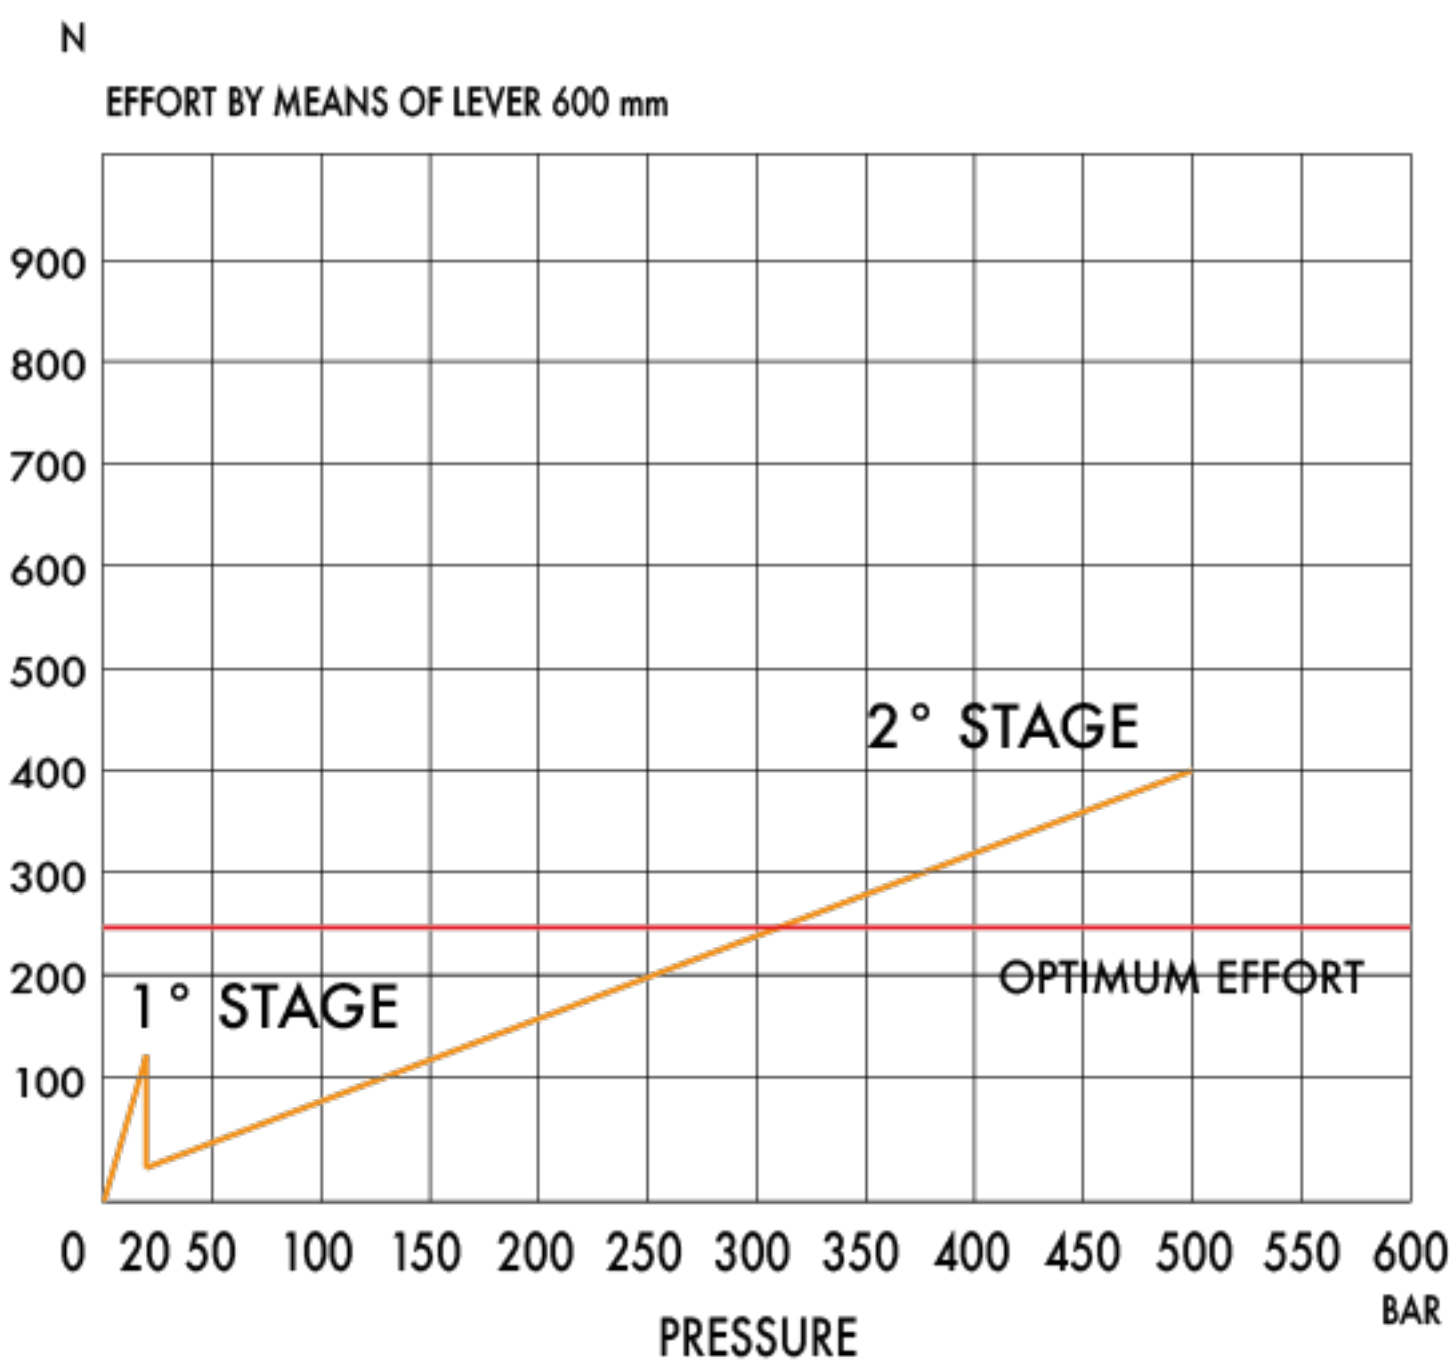

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	DISPLACEMENT cm ³		PRESSURE BAR		MASS KG	CODE
						STAGE 1	STAGE 2	STAGE 1	STAGE 2		
5-80	354	165	65	30	32	80,588	5,036	20	500	6,200	6071.0129