

Hand pumps

PMO 50 m-s


Tech sheet

DETAILS

with normally closed manipulator
double acting hand pump for single acting cylinder
for fixing to wall

SPECIFICATIONS



Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection $\varnothing 27$
White zinc plated external parts
Standard colour black

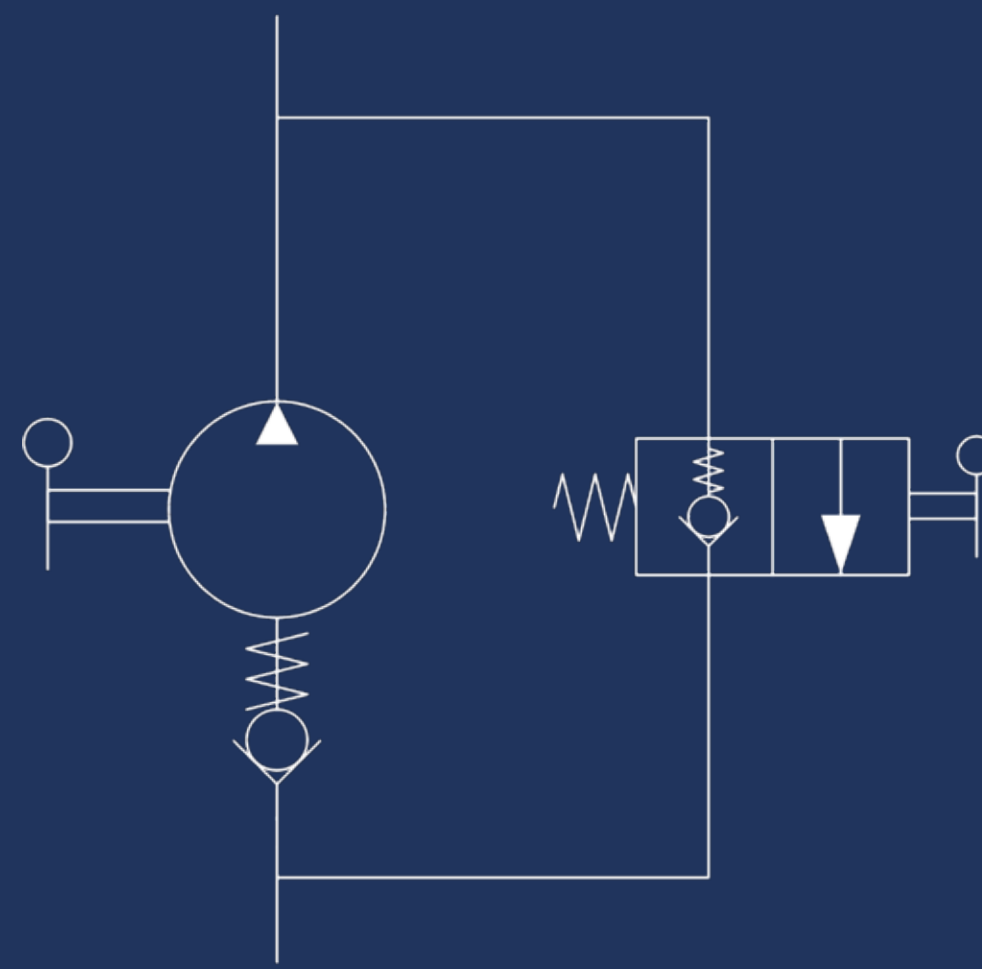

On Demand ATEX Certificates

II2G Ex h IIB TX Gb
II2D Ex h IIB TX Db

EFFORT DIAGRAM

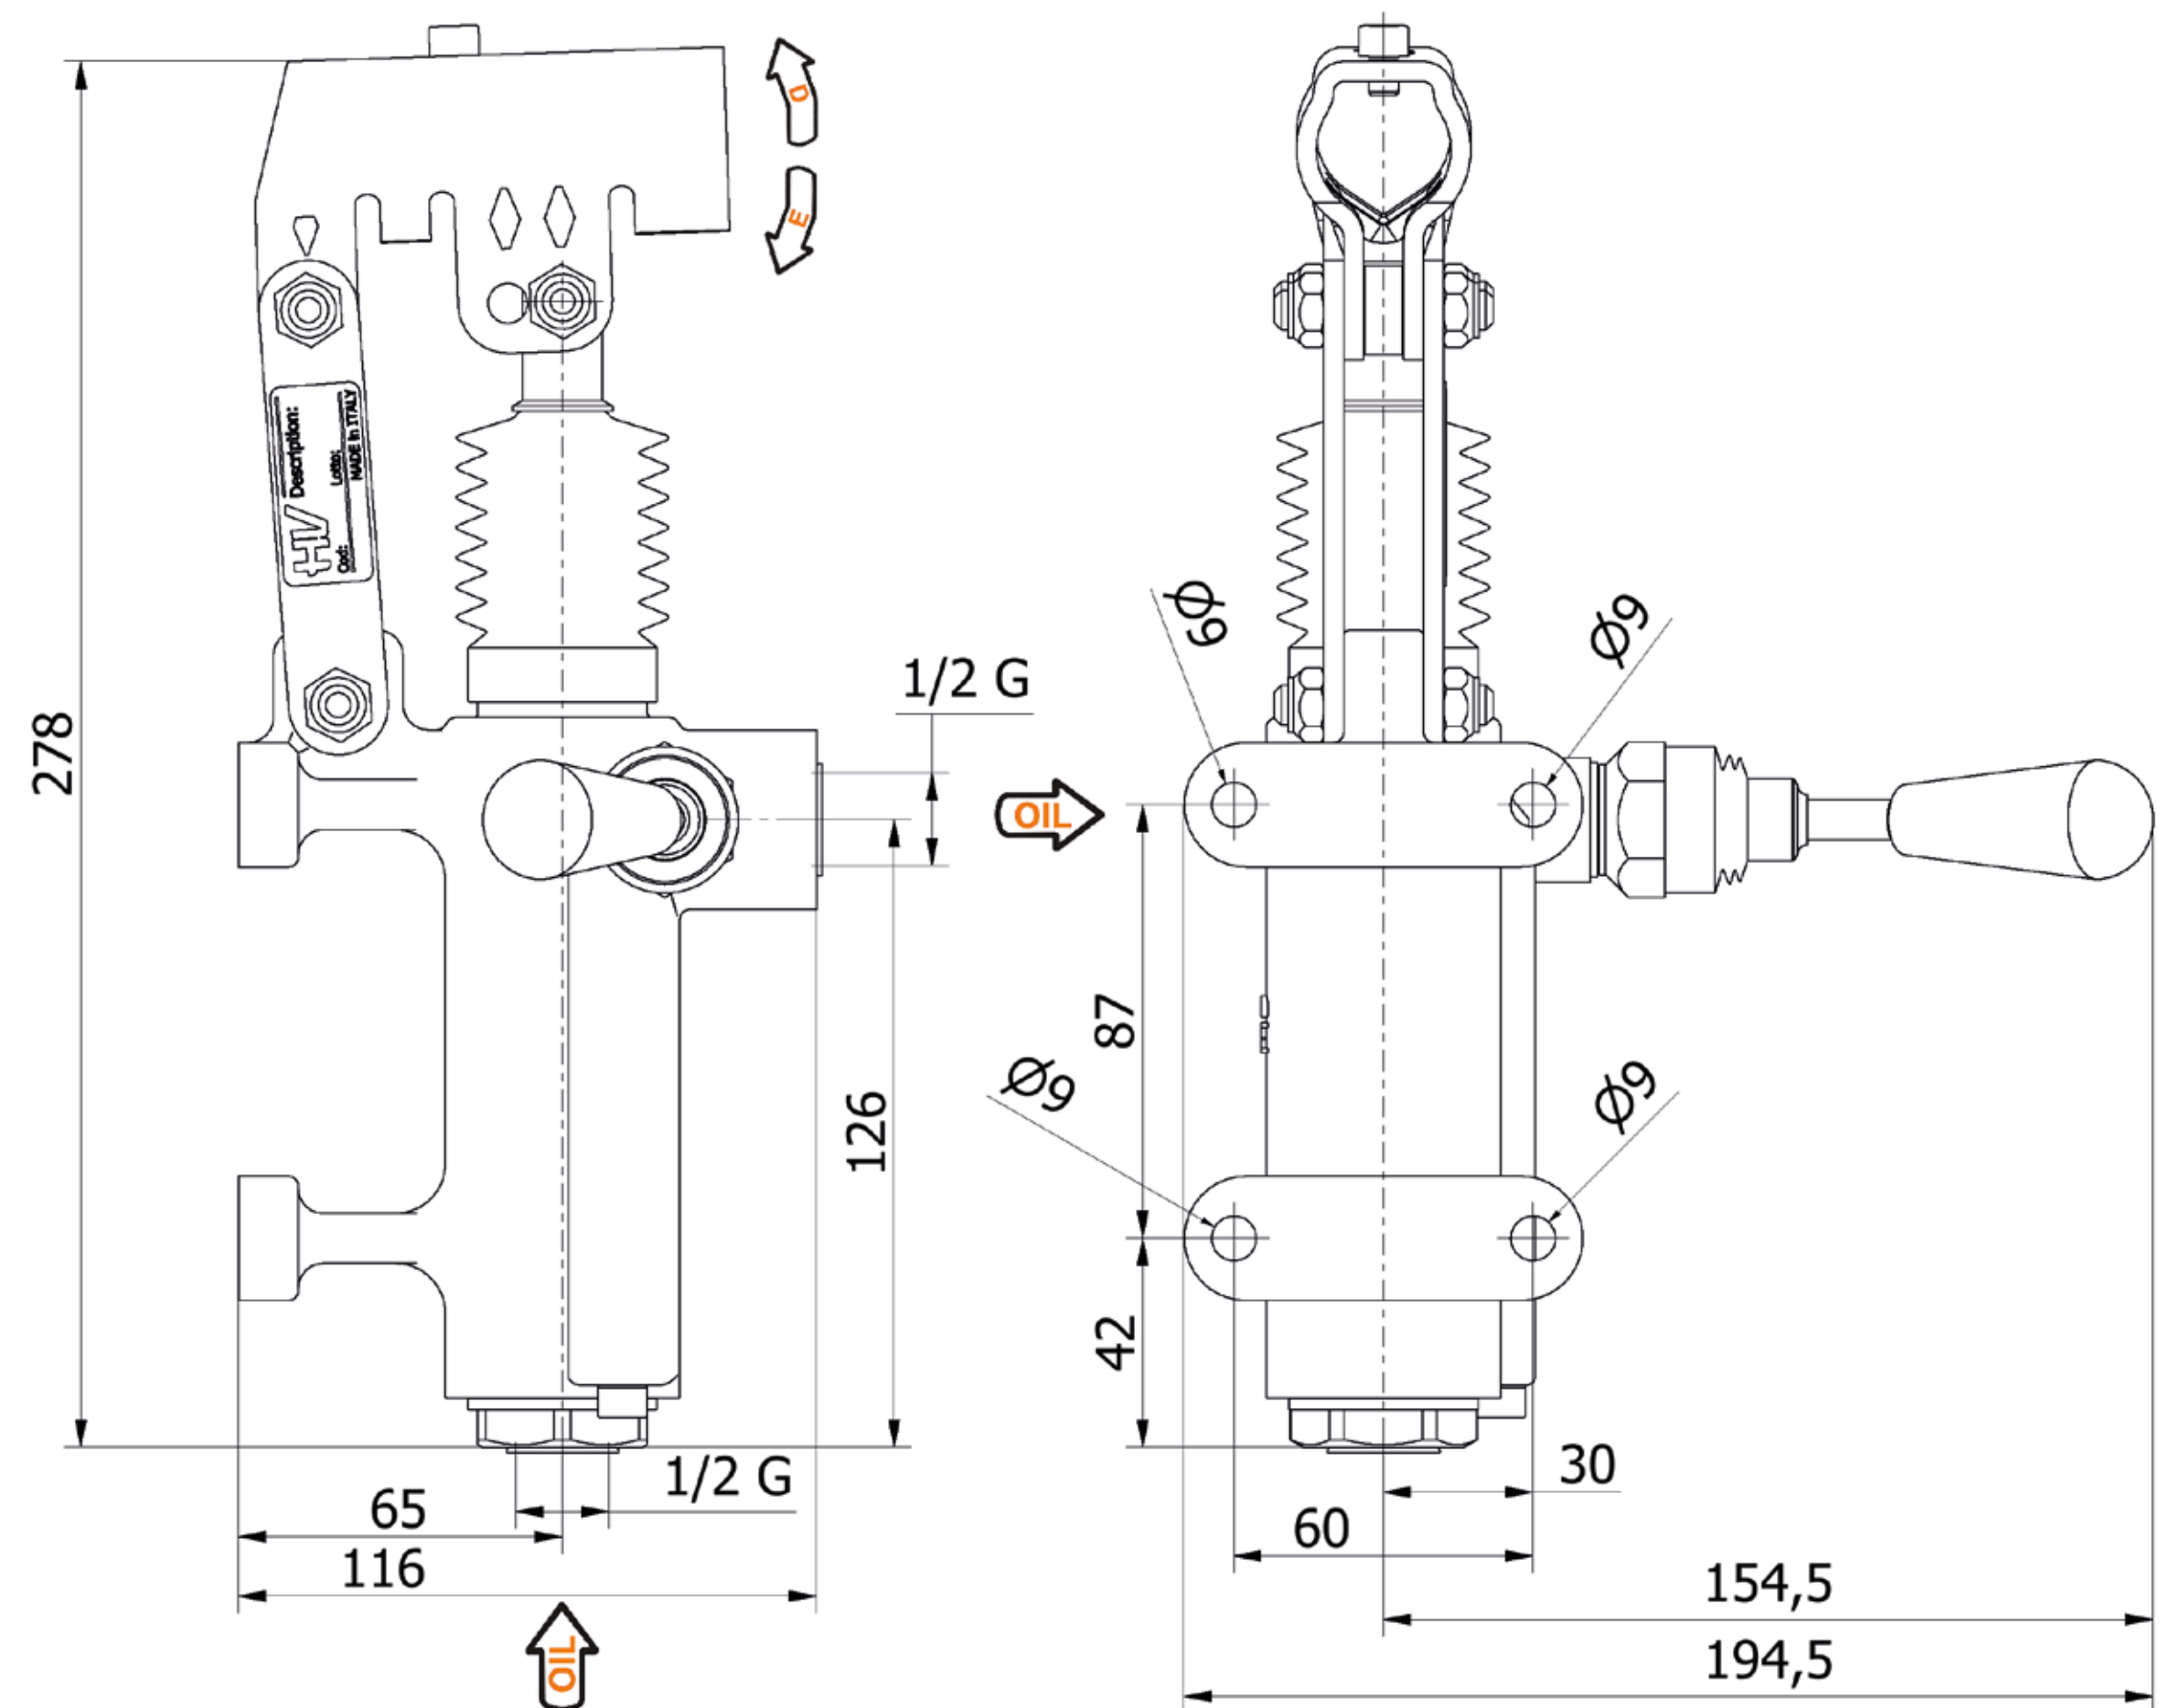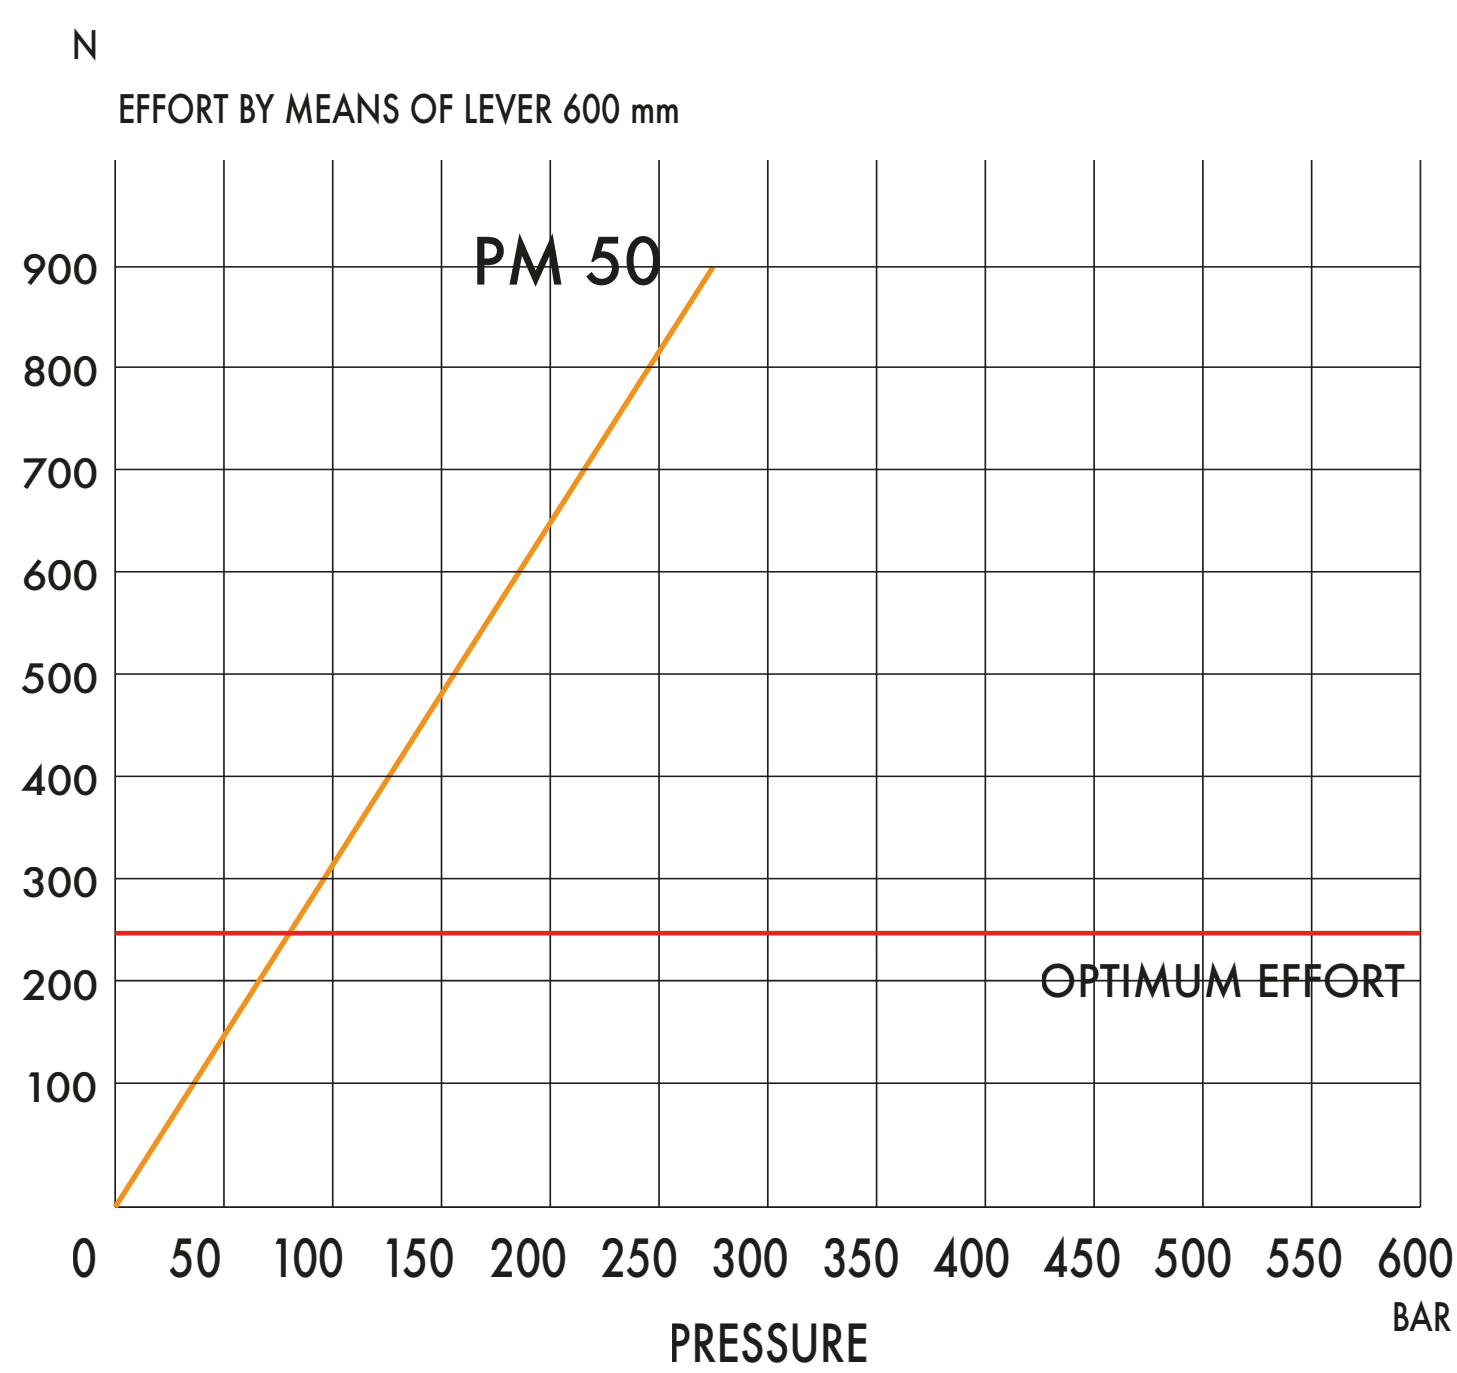

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm ³	PRESSURE BAR		MASS KG	CODE
							OPTIMAL	MAX		
50	--	--	--	38	37	43,825	80	280	3,400	6077.0034



HV Hydraulic s.r.l. | Take YOU to another WORLD

Head Office
Via dell'Agricoltura, 162 Loc. Castello di Serravalle
40053 VALSAMOGGIA (BO) Italy

Warehouse
Via del Lavoro, 111 e 135 Loc. Castello di Serravalle
40053 VALSAMOGGIA (BO) Italy