Hand pumps

PMSE 2,5 L

Tech sheet

DETAILS

with release lever
single acting hand pump for a single acting cylinder
for fixing to wall

SPECIFICATIONS

Aluminum body
Piston treated with Niploy
Hold lever of zinc plated steel
Lever connection of diam. 20
External parts of zinc plated steel

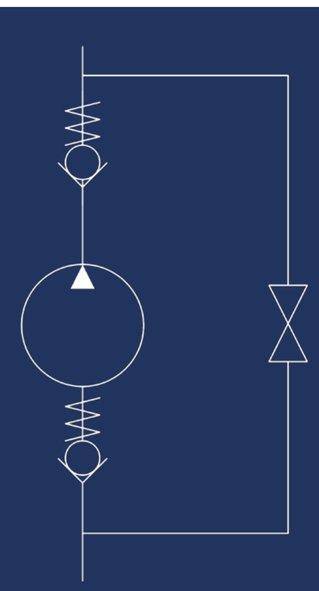

On Demand ATEX Certificates

II2G Ex h IIB TX Gb
II2D Ex h IIIB TX Db

EFFORT DIAGRAM

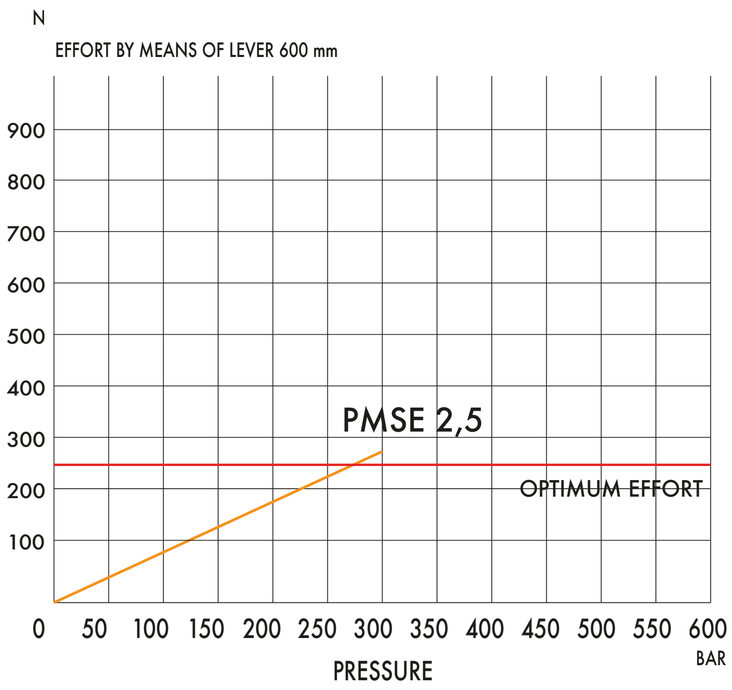

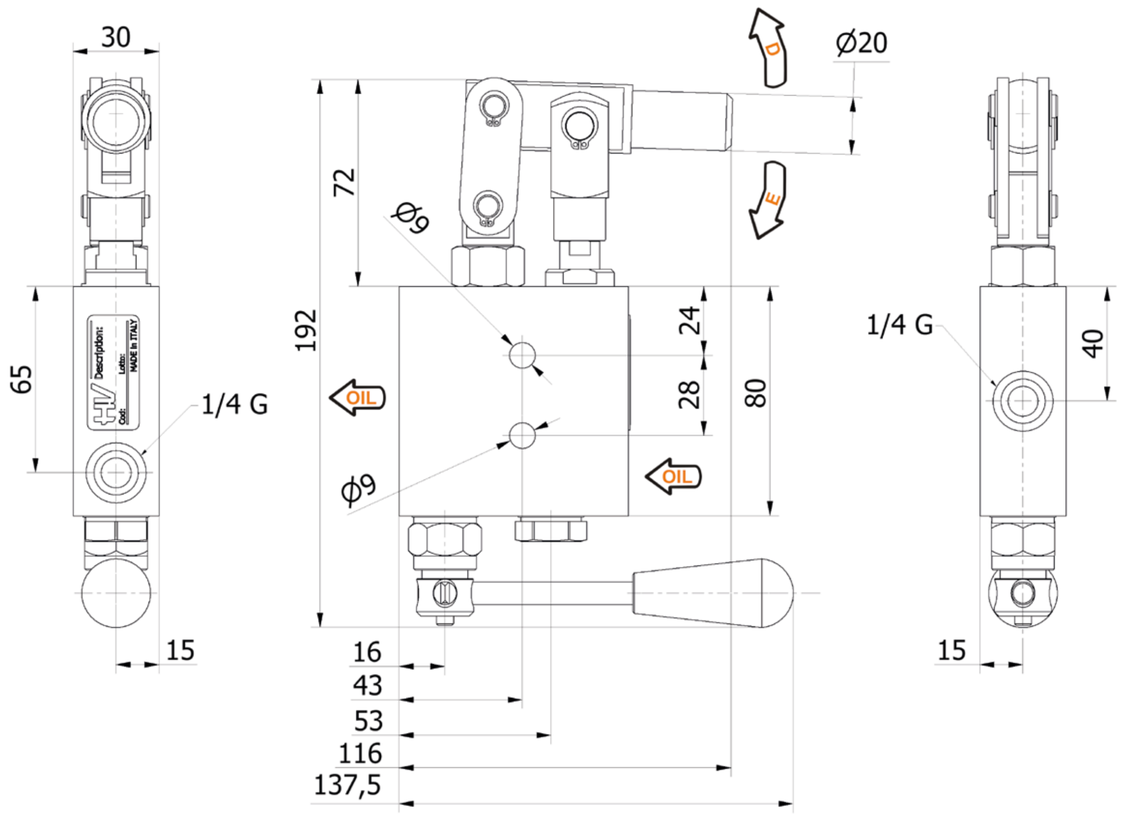

DISPLACEMENT cm³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm³	PRESSURE BAR		MASS KG	CODE
							OPTIMAL	MAX		
2,5	- -	- -	- -	9	24	2,610	270	300	1,200	6064.0001

QUALITY SYSTEM CERTIFICATION
DNV
ISO 9001

HV Hydraulic s.r.l. | Take YOU to another WORLD

Head Office
Via dell'Agricoltura, 162 Loc. Castello di Serravalle
40053 VALSAMOGGIA (BO) Italy

Warehouse
Via del Lavoro, 111 e 135 Loc. Castello di Serravalle
40053 VALSAMOGGIA (BO) Italy

Tel. + 39 051 670.50.11 – Fax +39 051 670.53.74
P.IVA/C.F. 02390201206 – R.E.A. 435998 – Codice Univoco: 7HE8RN5
E-mail: info@hvhydraulic.com - Web: www.hvhydraulic.com