

Hand pumps

PMSE 2,5 byB

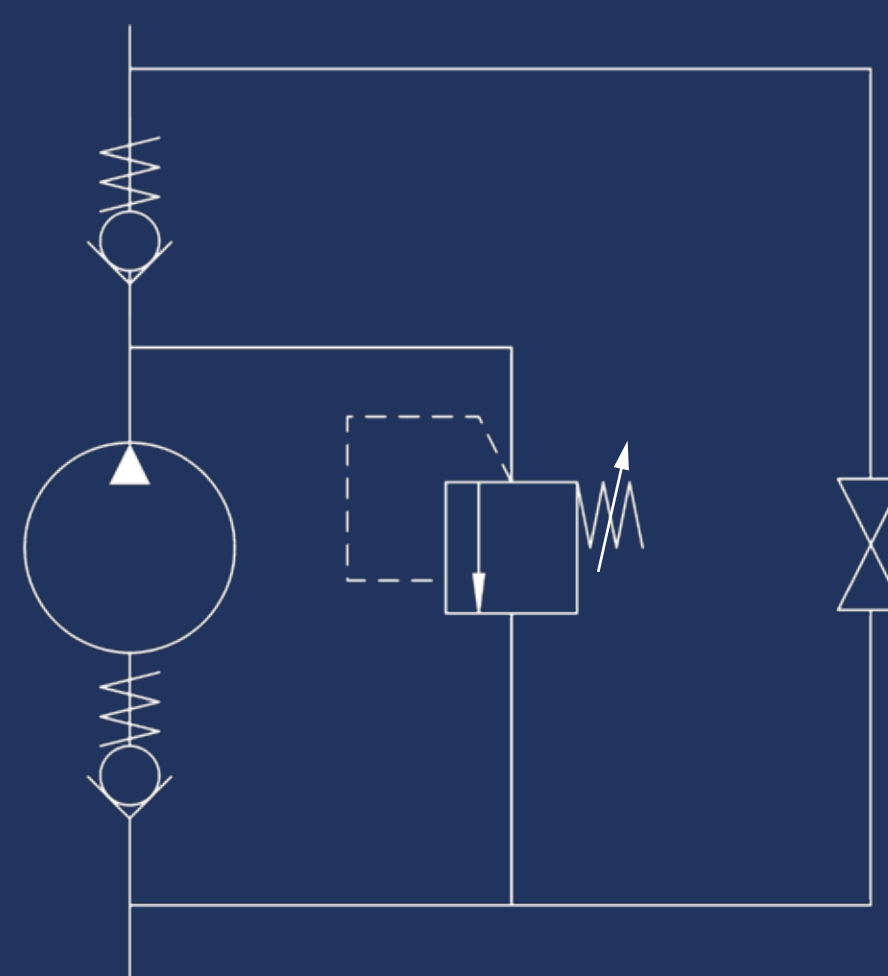
Tech sheet

DETAILS

with release hand wheel
with pressure relief valve
single acting hand pump for a single acting
cylinder for fixing to wall

SPECIFICATIONS

Aluminum body
Piston treated with Niploy
Hold lever of zinc plated steel
Lever connection of diam. 20
External parts of zinc plated steel



Pressure relief valve standard setting: **100 bar**

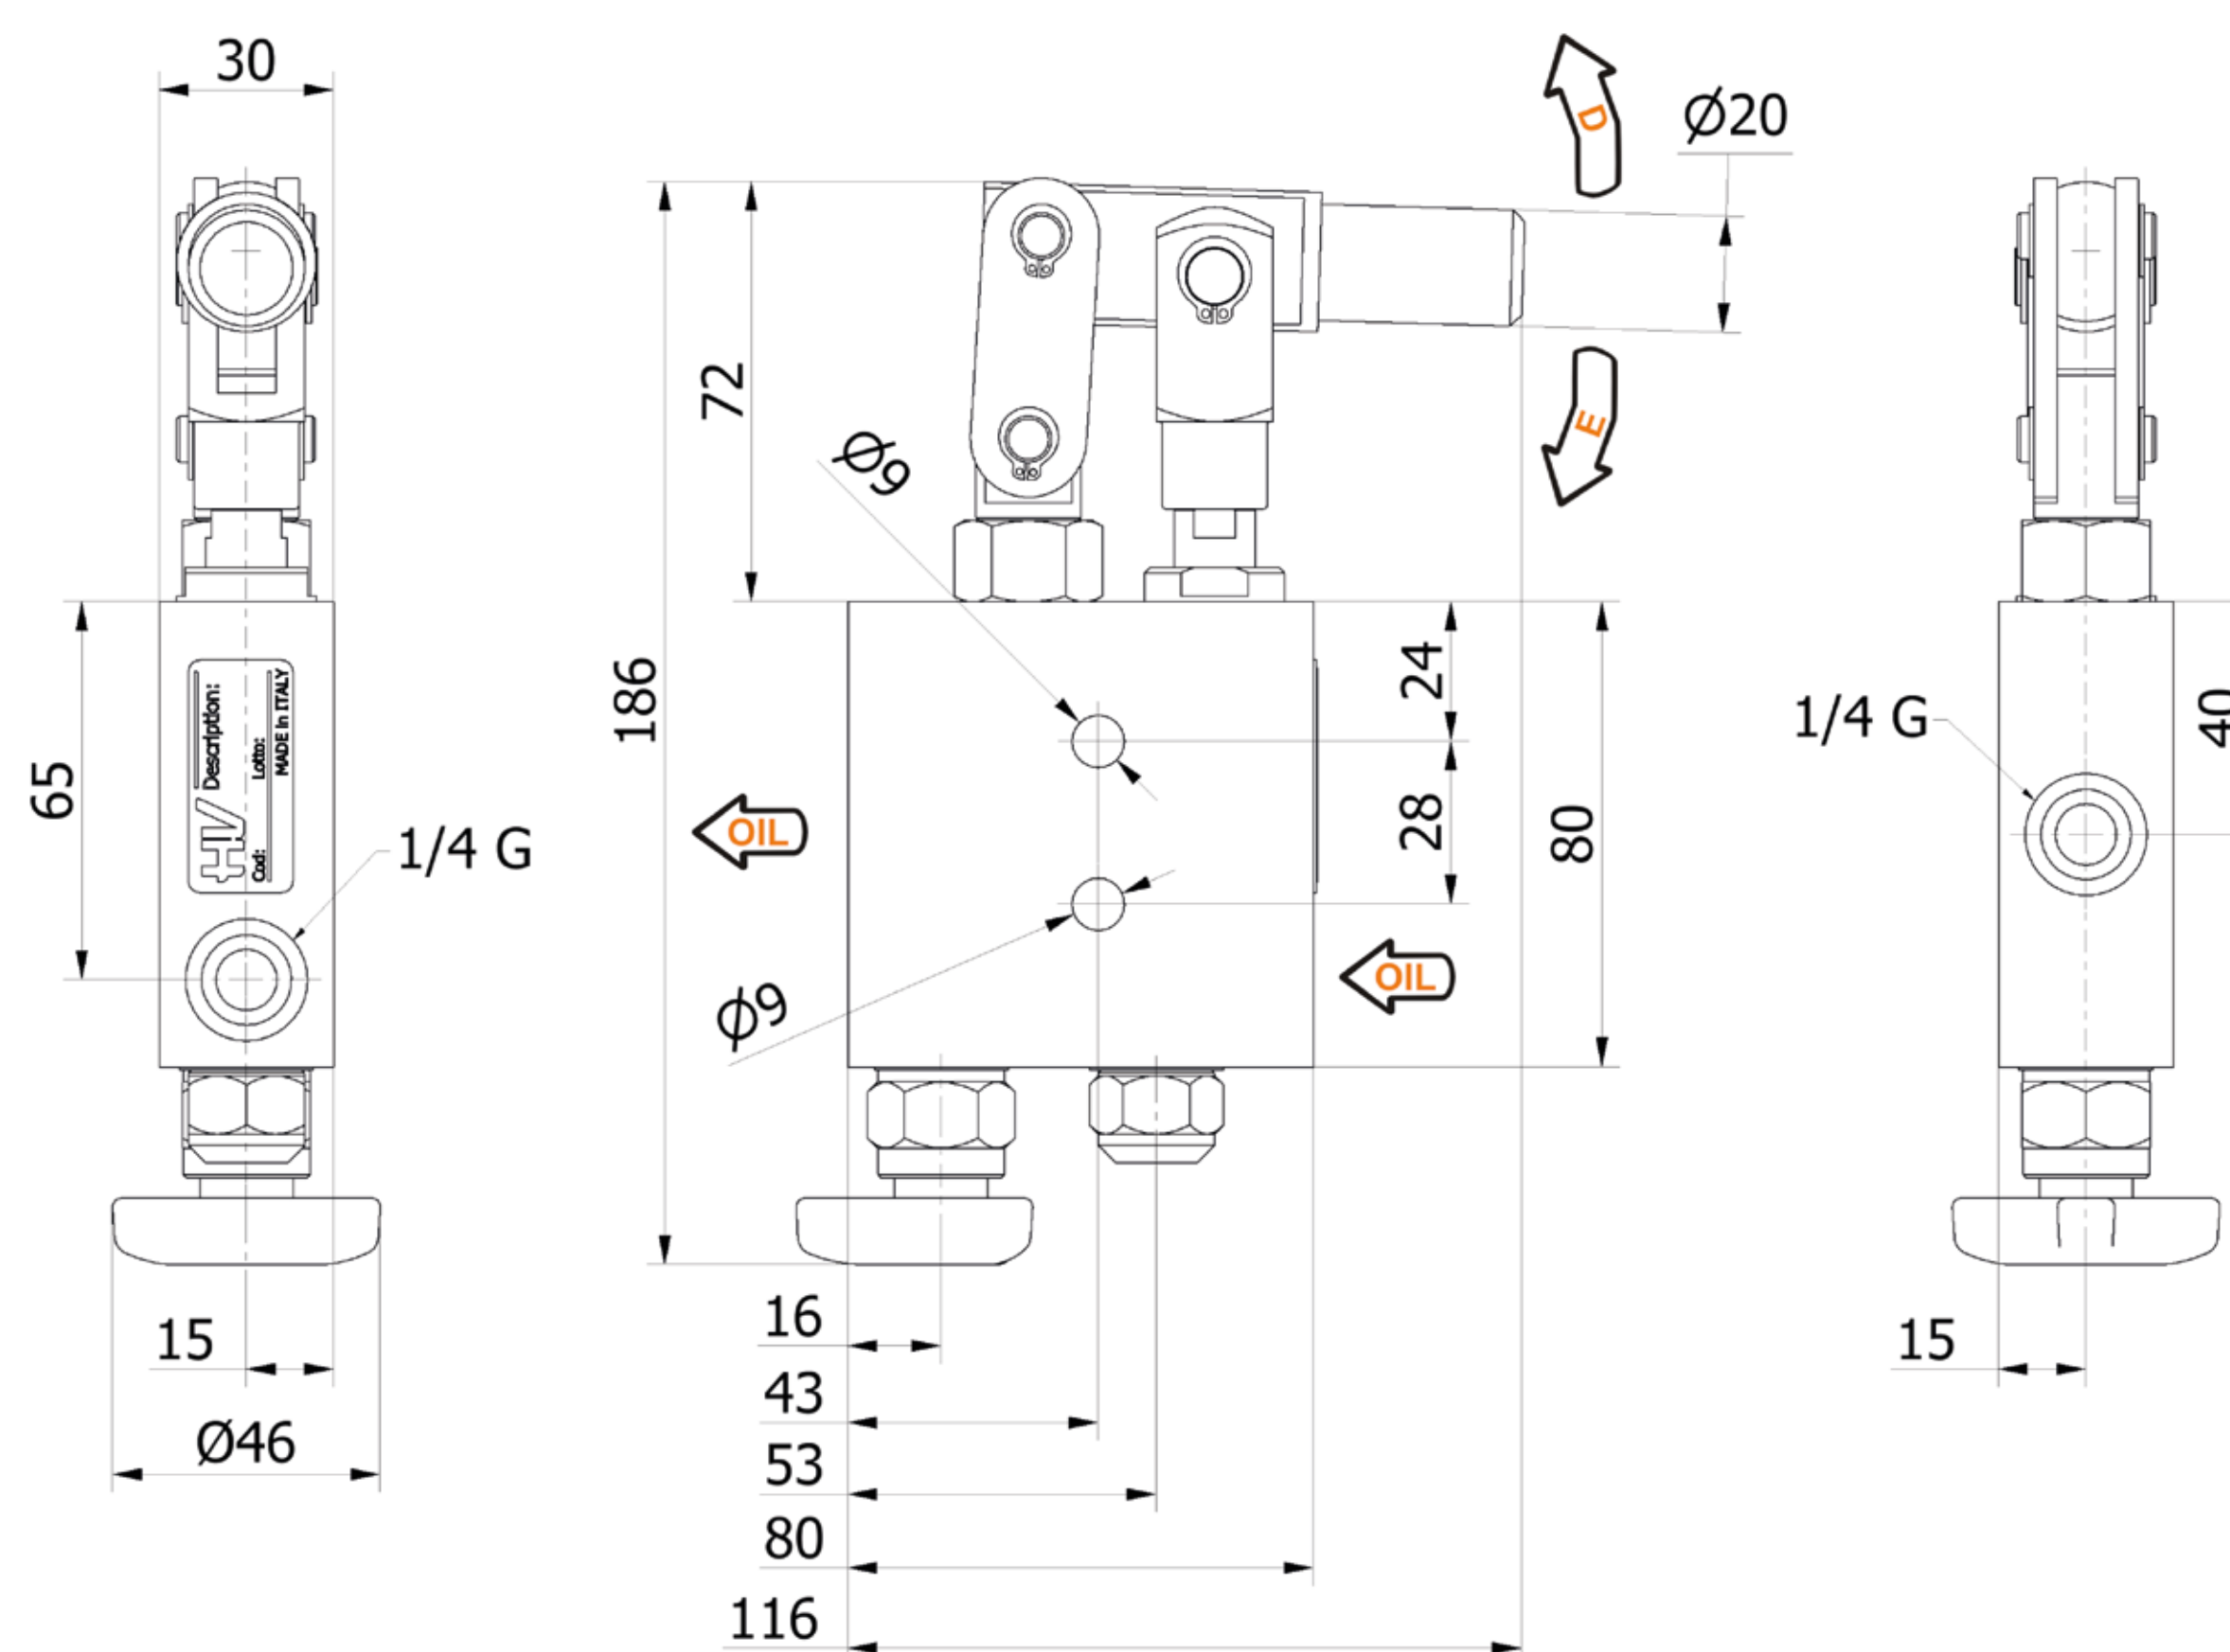
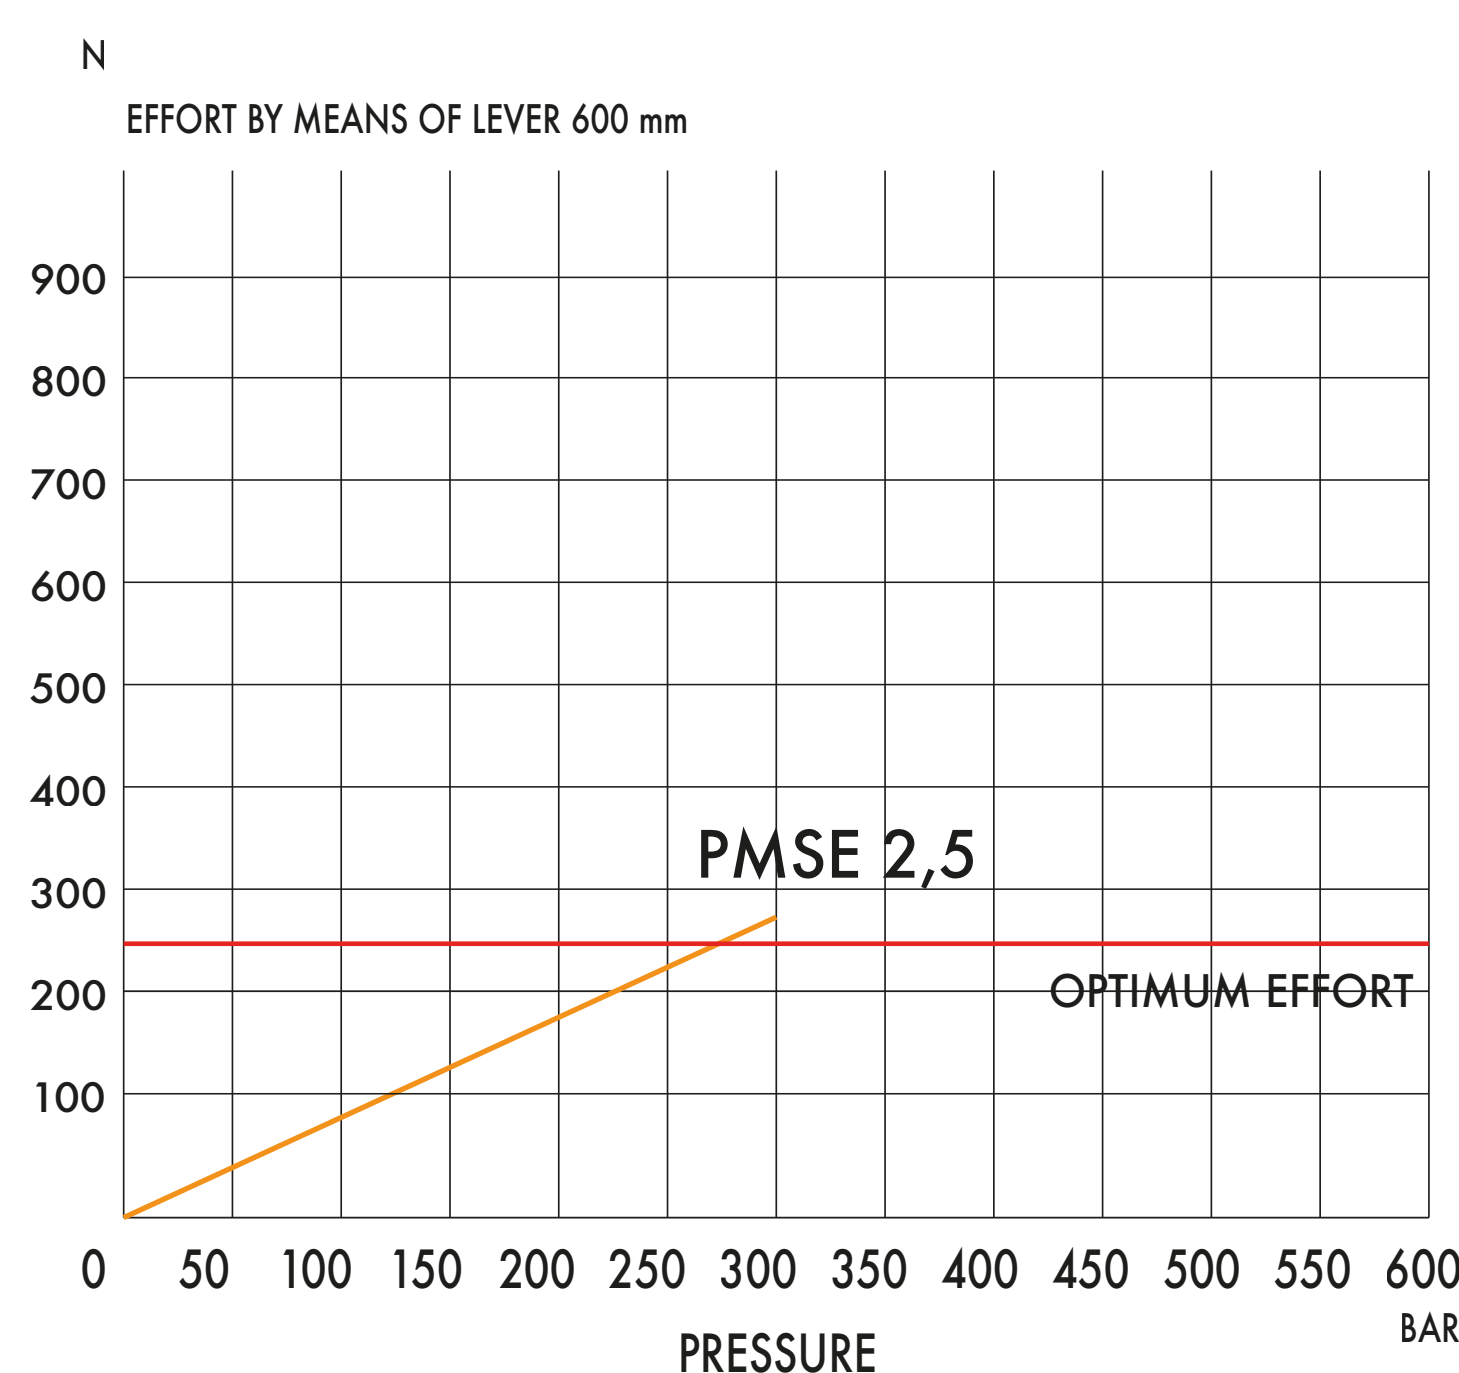


On Demand ATEX Certificates

II2G Ex h IIB TX Gb

II2D Ex h IIIB TX Db

EFFORT DIAGRAM

[illegible]

HV Hydraulic s.r.l.

Take YOU to another WORLD

Head Office

Via dell'Agricoltura, 162 Loc. Castello di Serravalle
40053 VALSAMOGGIA (BO) Italy

Warehouse

Via del Lavoro, 111 e 135 Loc. Castello di Serravalle
40053 VALSAMOGGIA (BO) Italy