

Hand pumps

PMSE 2,5 e

Tech sheet

DETAILS

without release hand wheel
single acting hand pump for a single acting cylinder
for fixing to wall

SPECIFICATIONS



Aluminum body
Piston treated with Niploy
Hold lever of zinc plated steel
Lever connection of diam. 20
External parts of zinc plated steel



On Demand ATEX Certificates

I I2G Ex h IIB TX Gb
I I2D Ex h IIIB TX Db

EFFORT DIAGRAM

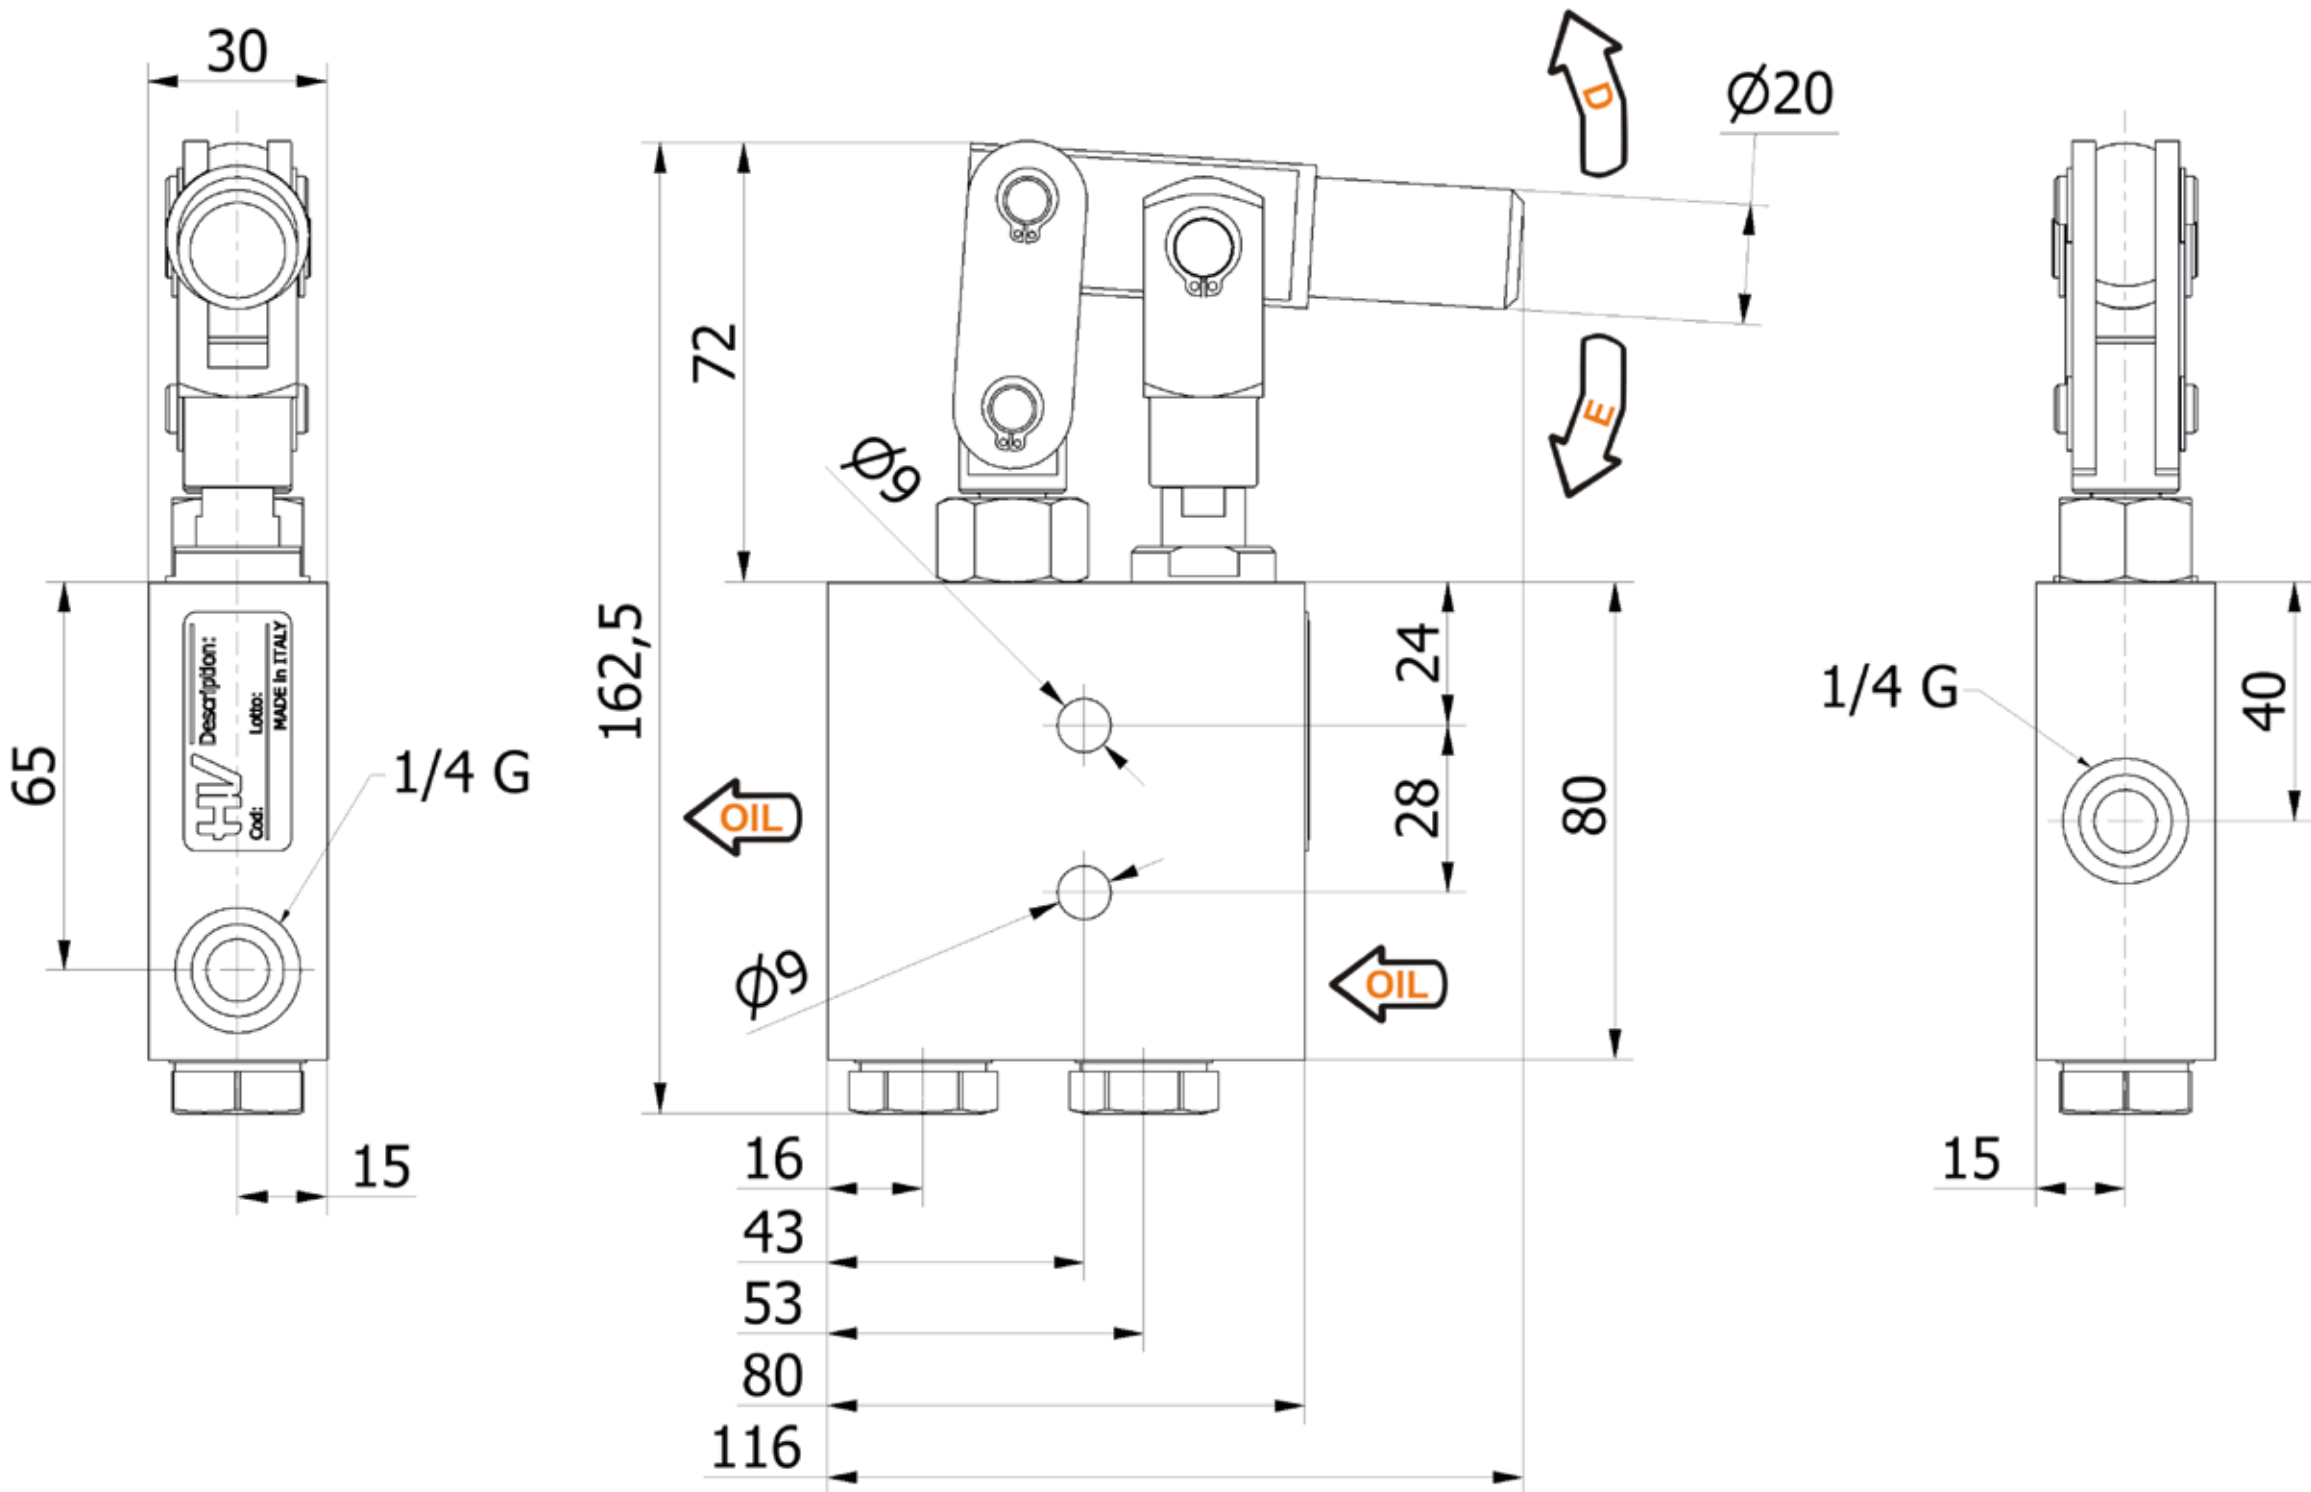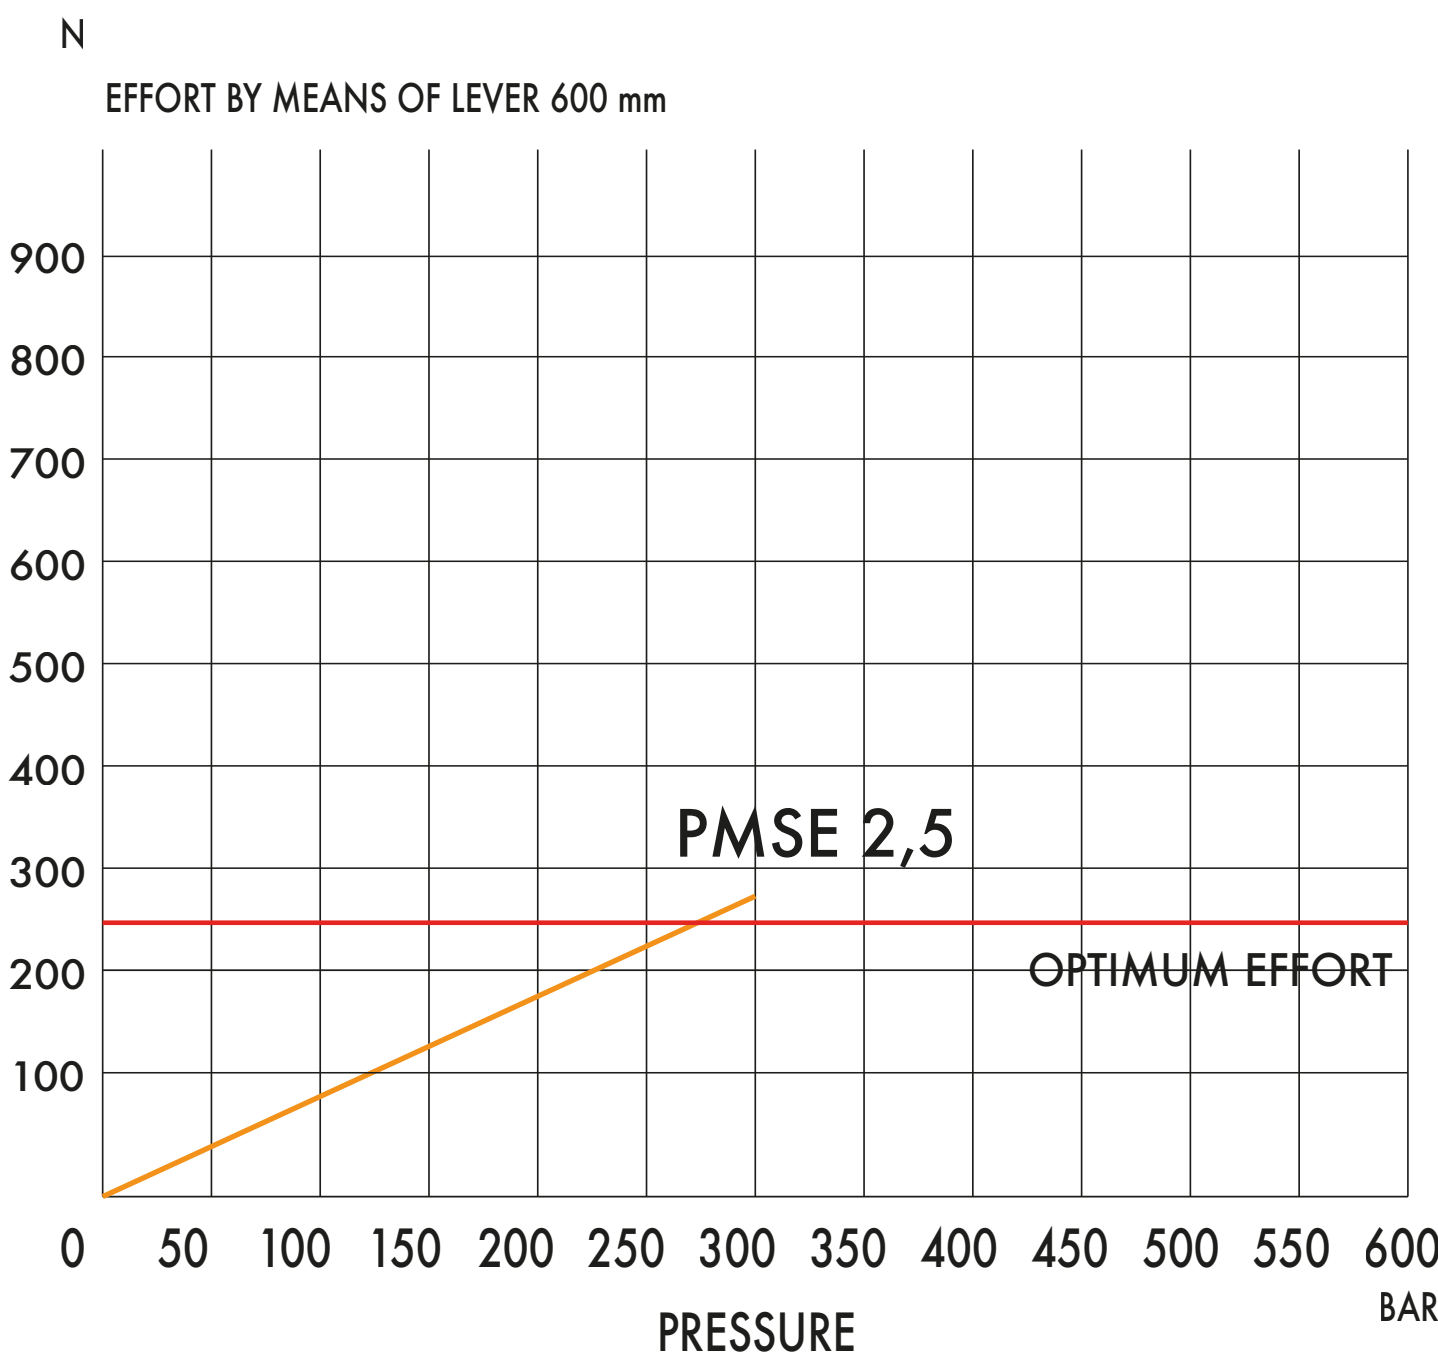

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm ³	PRESSURE BAR		MASS KG	CODE
							OPTIMAL	MAX		
2,5	- -	- -	- -	9	24	2,610	270	300	1,200	6064.0004