


Hand pumps

PMSE 8-15 byA-s

Tech sheet

DETAILS
 with release hand knob
 with integrated pressure relief valve
 single acting hand pump for a single acting cylinder
 for fixing to tank

SPECIFICATIONS
 Cast iron body
 Piston treated with Niploy
 Iron cast support lever
 Lever connection Ø 20
 White zinc plated external parts
 Standard colour black
 Oil tank mounting kit included


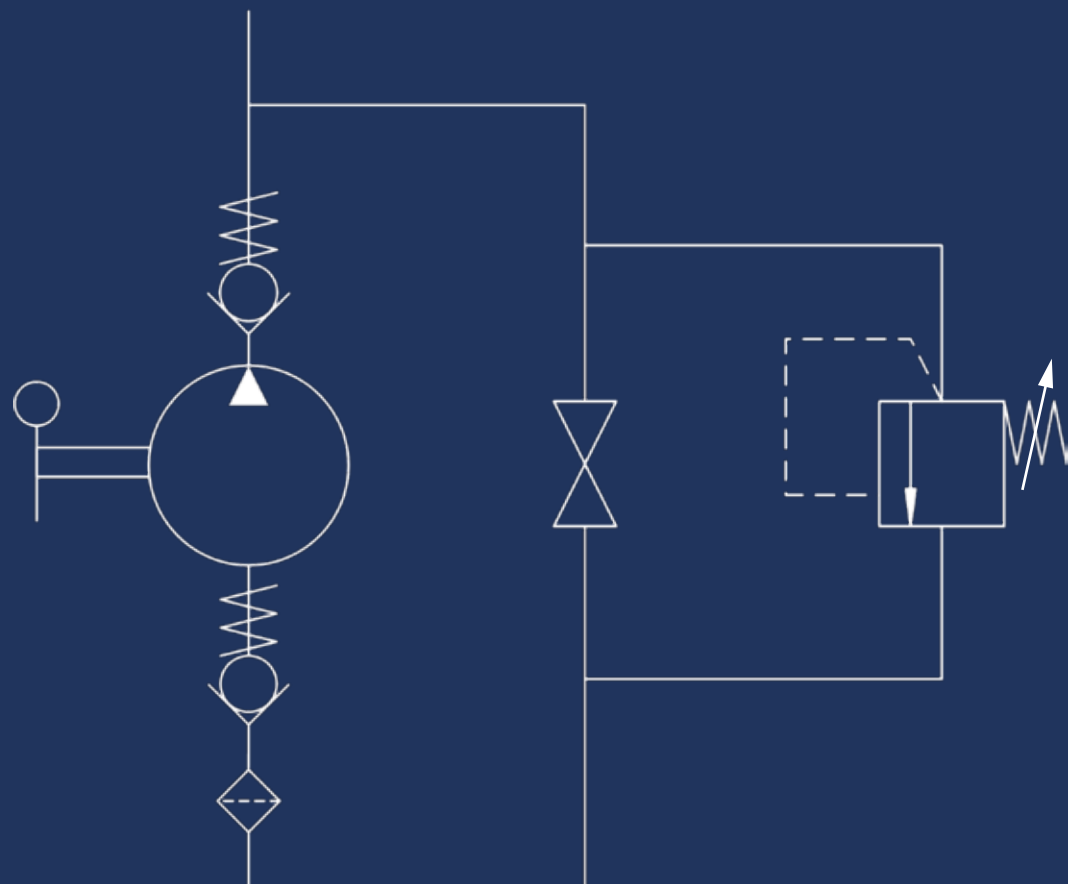


Pressure relief valve standard setting: 100 bar



On Demand ATEX Certificates
 II2G Ex h IIB TX Gb
 II2D Ex h IIIB TX Db

EFFORT DIAGRAM

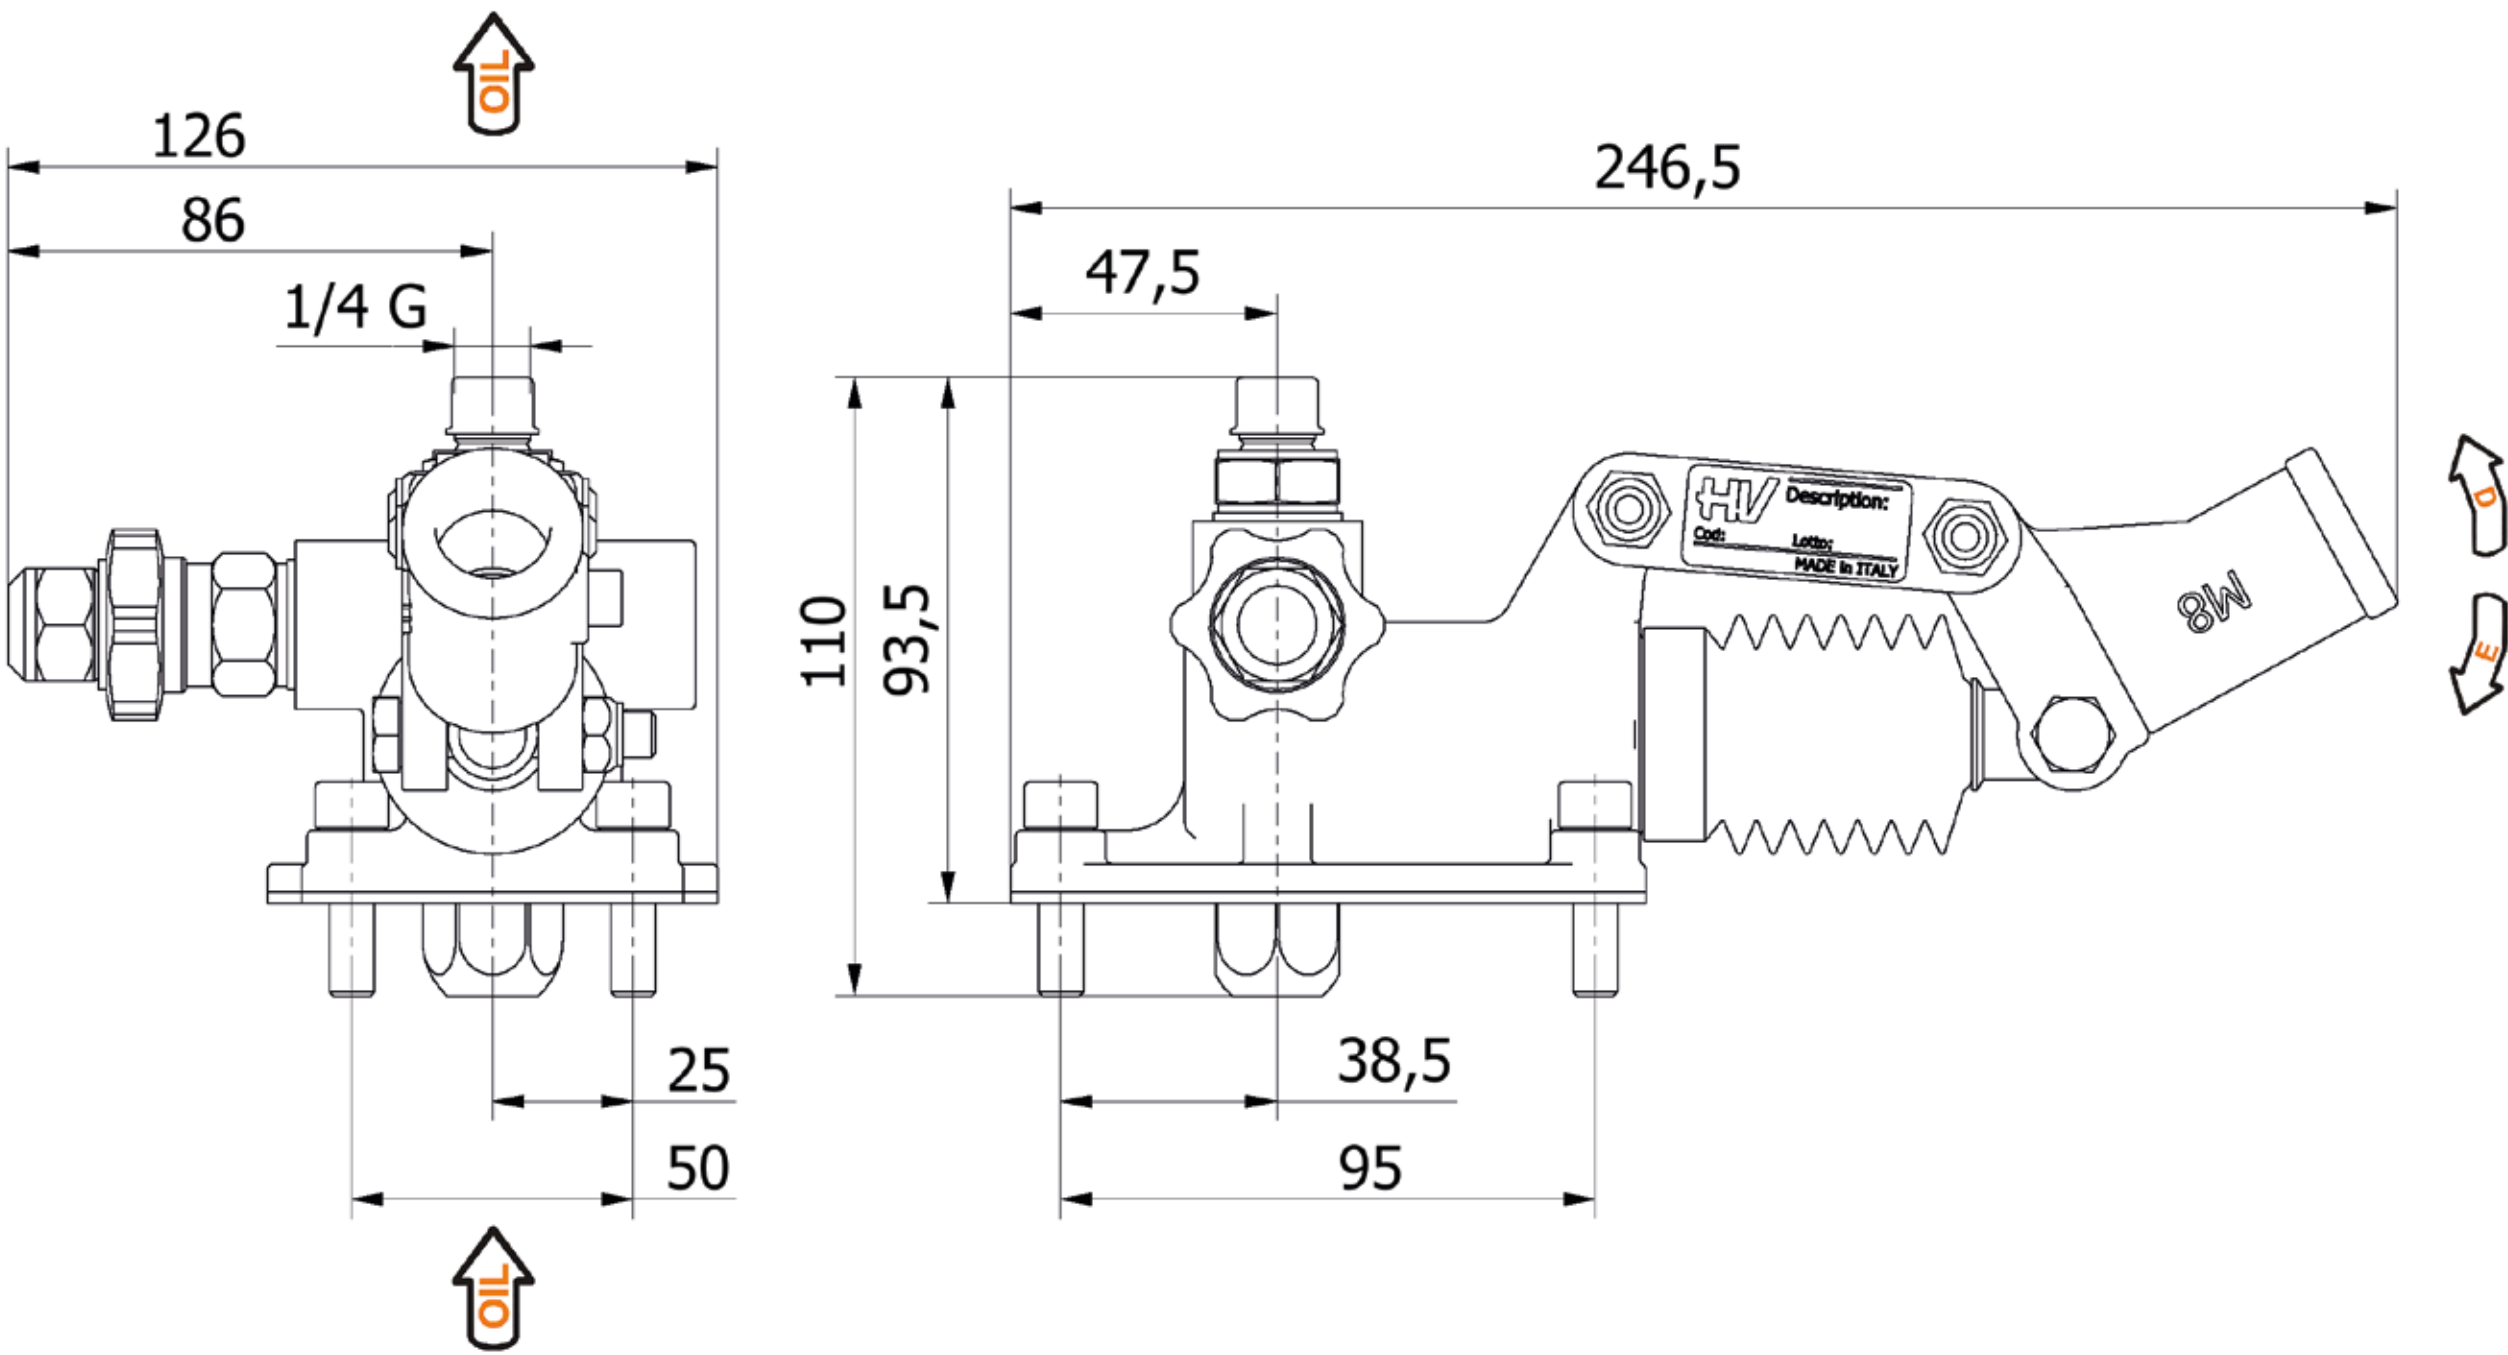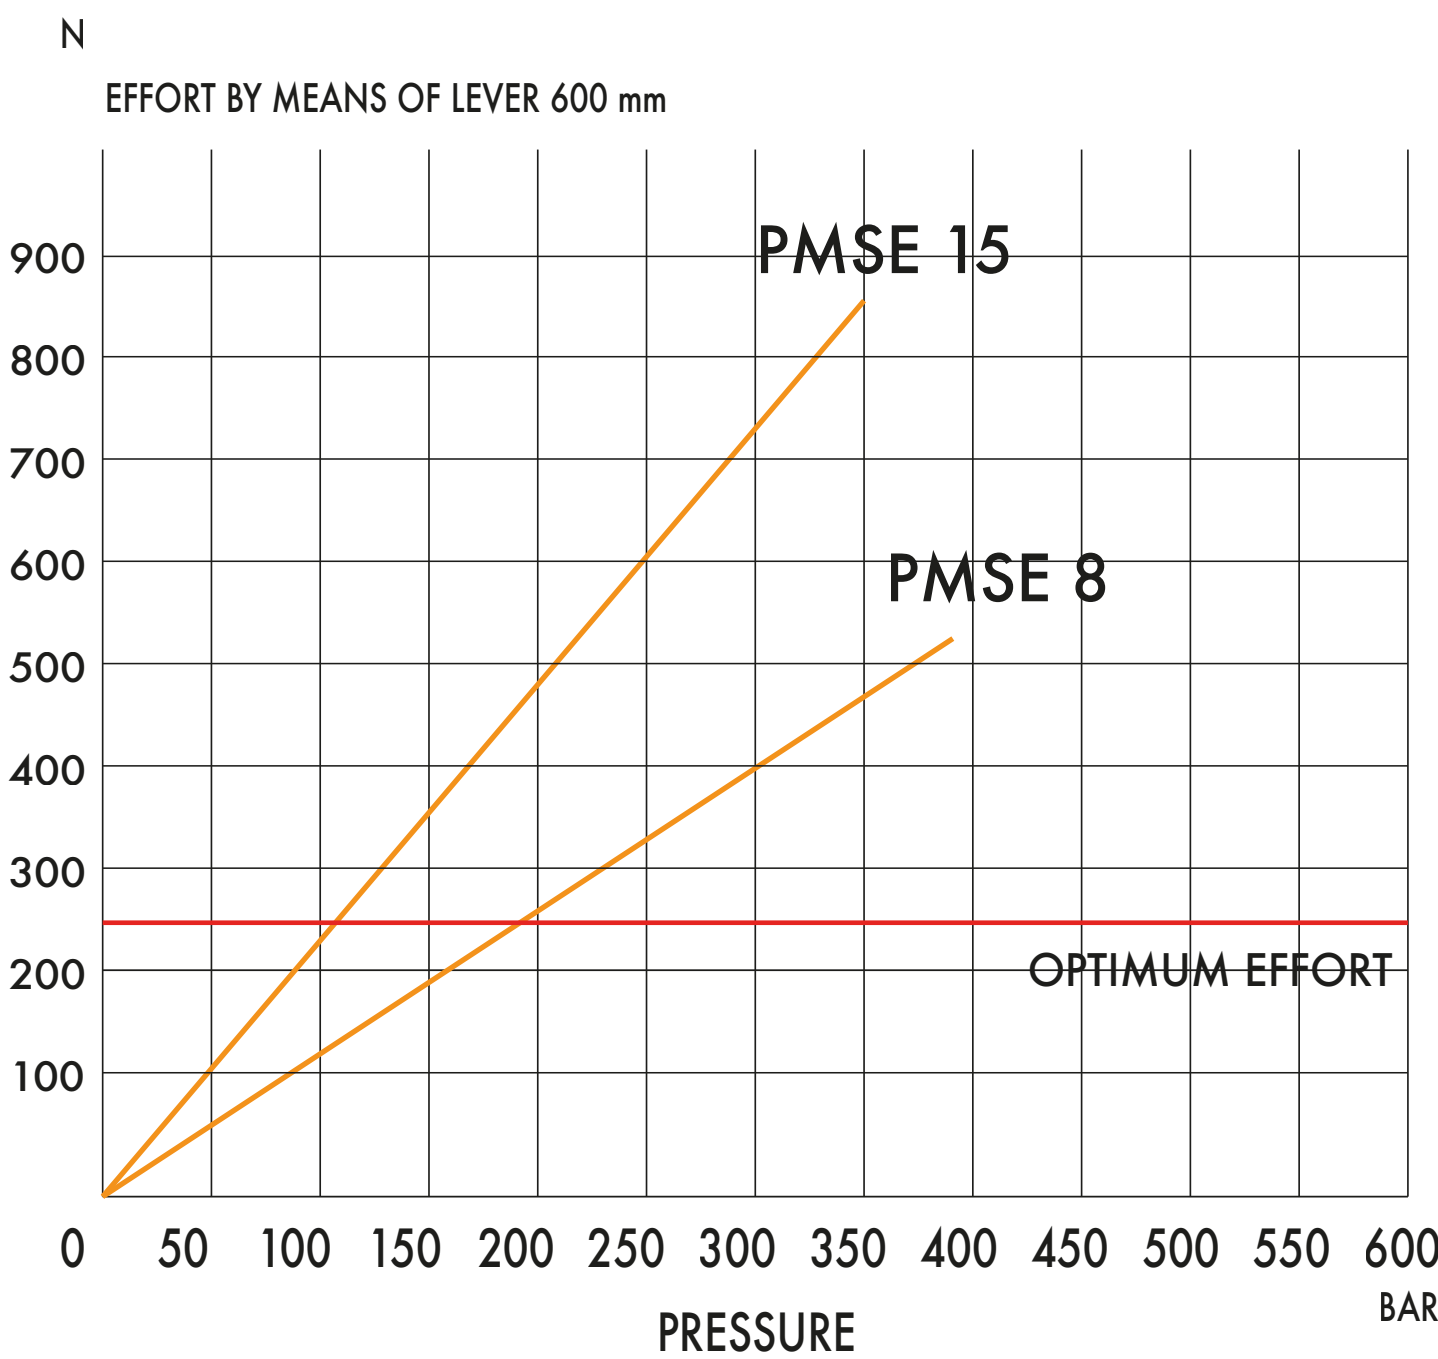

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm ³	PRESSURE BAR		MASS KG	CODE
							OPTIMAL	MAX		
8	--	--	--	30	26	8,042	180	380	3,200	6065.0041
15	--	--	--	30	26	15,205	110	350	3,200	6066.0041