

Hand pumps

PMSE 8-15 e-s


Tech sheet

DETAILS

without release hand knob
single acting hand pump for a single acting cylinder for fixing to tank

SPECIFICATIONS




Cast iron body
Piston treated with Niploy
Iron cast support lever
Lever connection Ø 20
White zinc plated external parts
Standard colour black
Oil tank mounting kit included

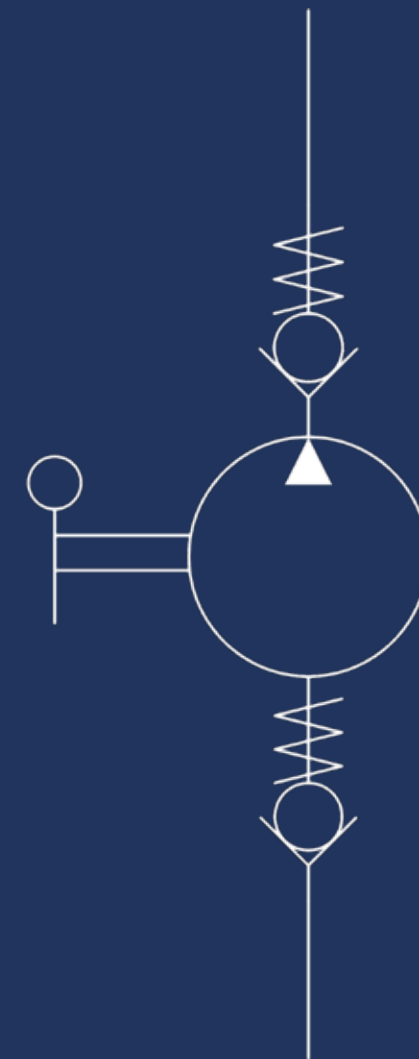

On Demand ATEX Certificates

II2G Ex h IIB TX Gb
II2D Ex h IIIB TX Db

EFFORT DIAGRAM

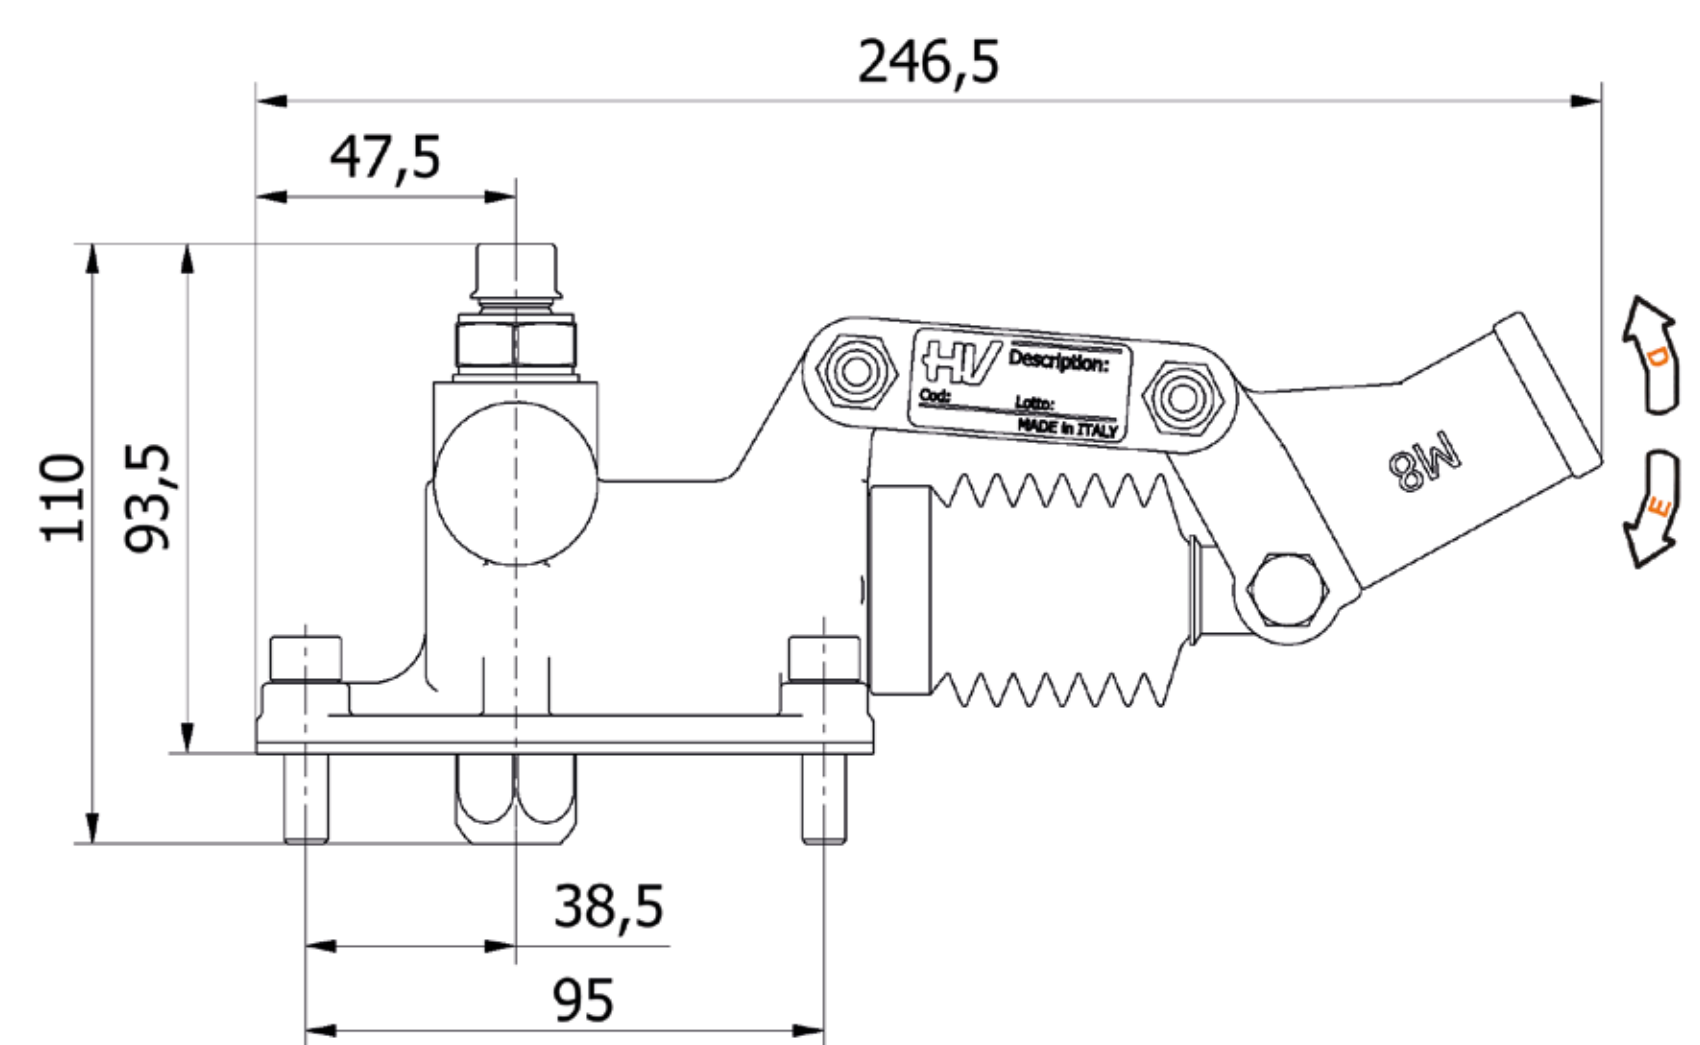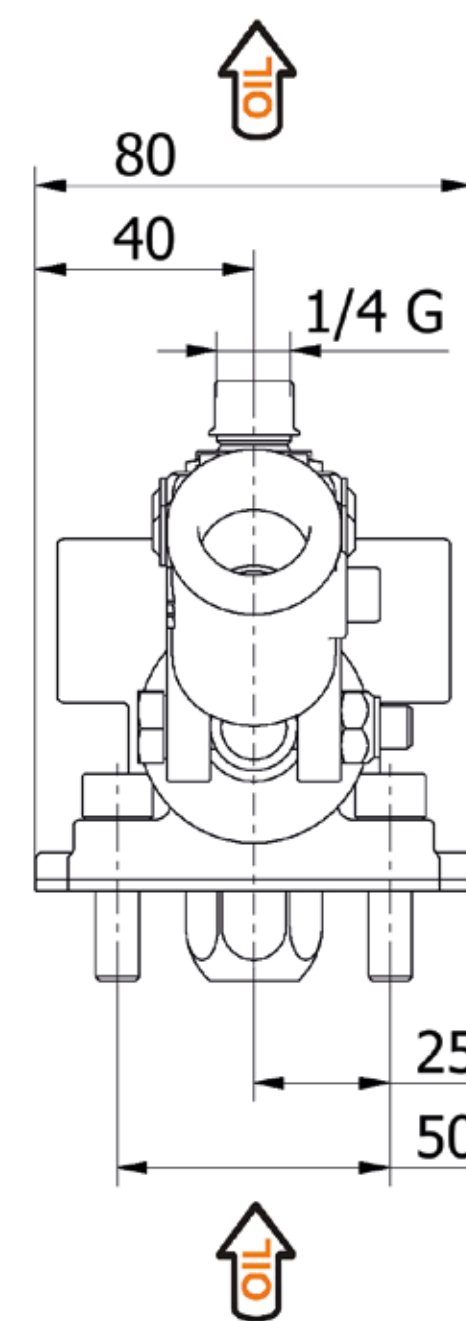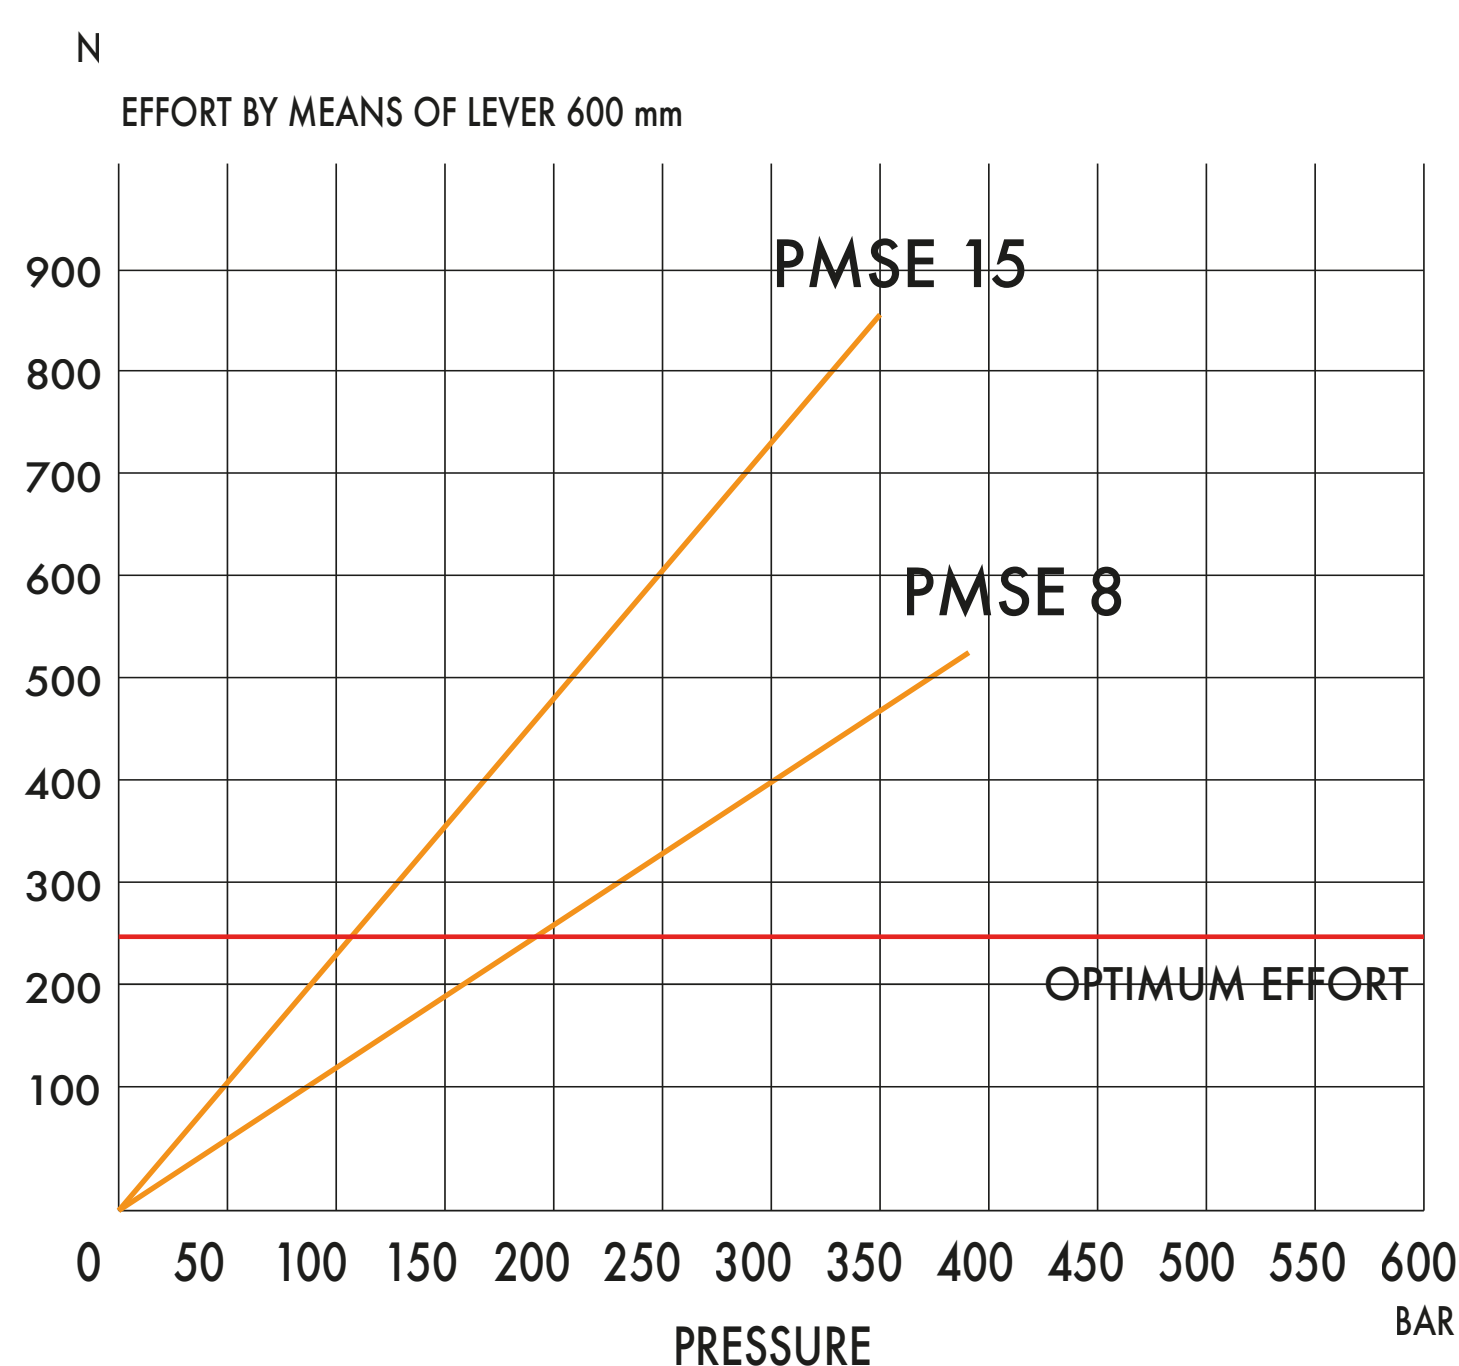

DISPLACEMENT cm ³	A mm	B mm	C mm	D °	E °	ACTUAL DISPLACEMENT cm ³	PRESSURE BAR		MASS KG	CODE
							OPTIMAL	MAX		
8	--	--	--	30	26	8,042	180	380	3,200	6065.0039
15	--	--	--	30	26	15,205	110	350	3,200	6066.0039



HV Hydraulic s.r.l. | Take YOU to another WORLD

Head Office
Via dell'Agricoltura, 162 Loc. Castello di Serravalle
40053 VALSAMOGGIA (BO) Italy

Warehouse
Via del Lavoro, 111 e 135 Loc. Castello di Serravalle
40053 VALSAMOGGIA (BO) Italy